


# ARRI LIGHTING GRIP CATALOGUE

2006

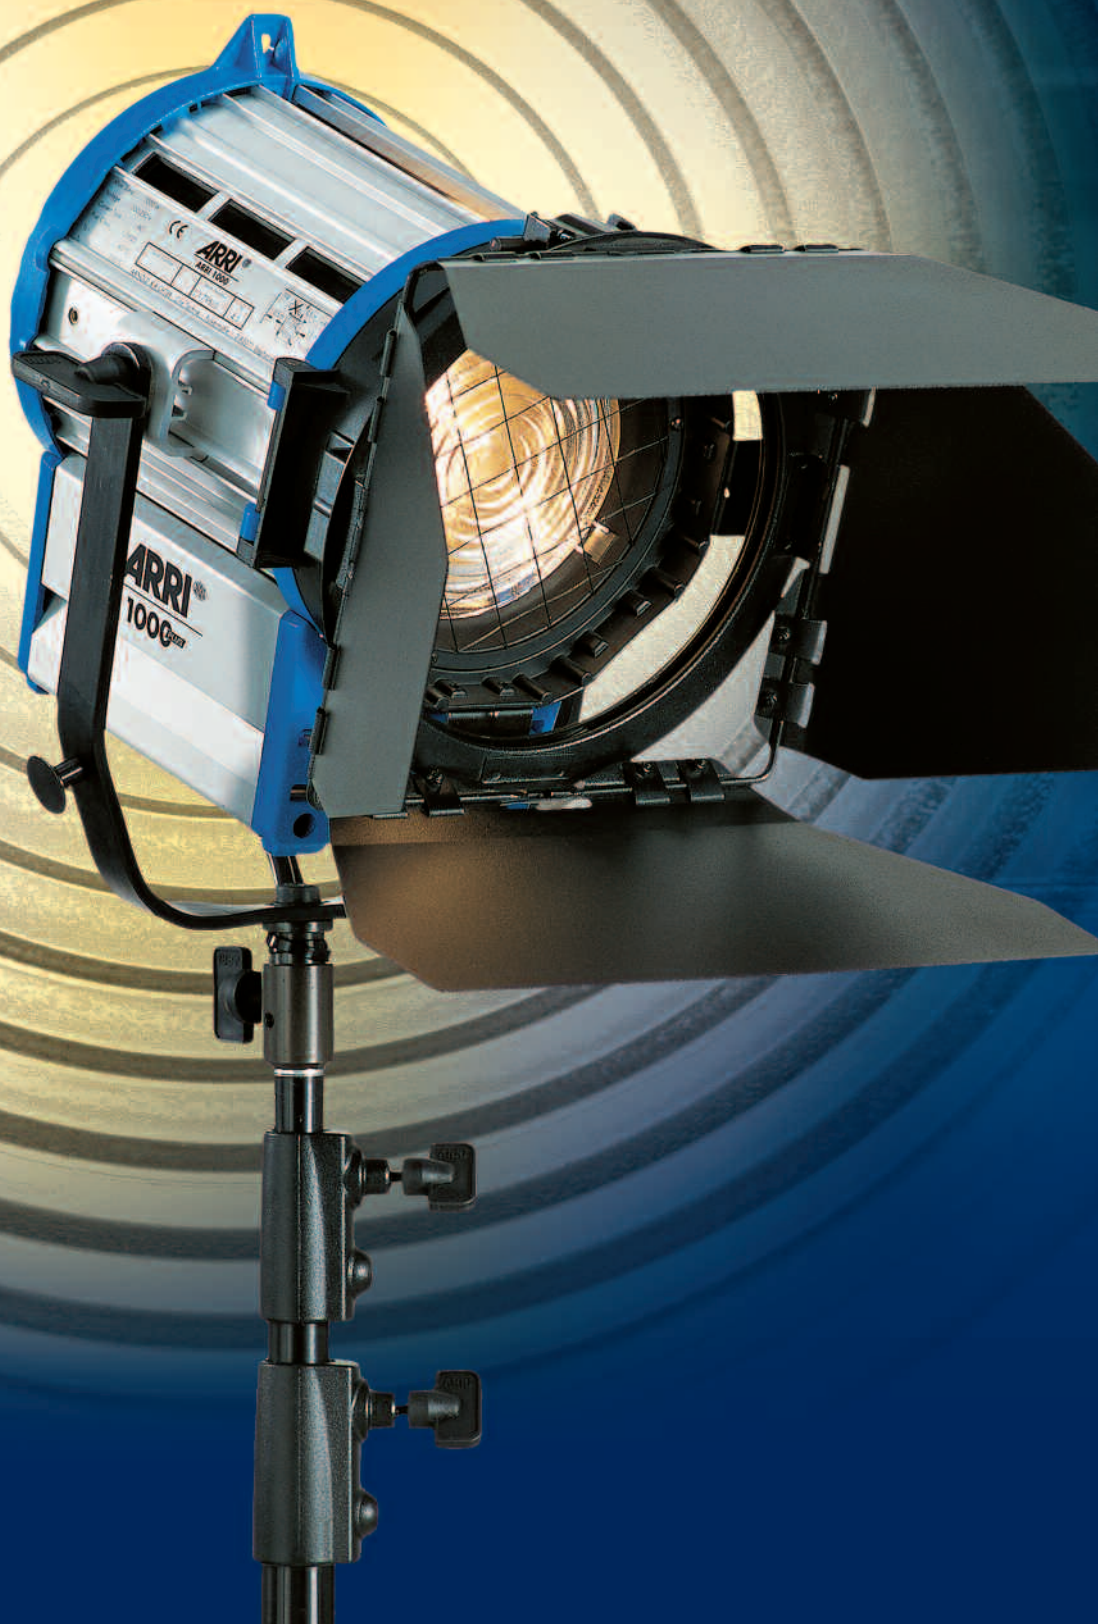

# Lighting

**ARRI extensive range of quality products has created an abundance of creative lighting solutions used throughout the world. From feature film and television productions, TV studios, major sporting events to industrial sectors, ARRI versatile products meet the diverse need of the lighting profession for projects of any size.**

The ARRI lighting can be used in every application where highest quality light is required and they are proven for decades on location and in the studio for reliability, durability and performance in all weather and climate conditions. ARRI lighting is designed and built by professionals for professionals.


## ARRI X CERAMIC 250

New from ARRI is the ARRI X Ceramic 250, which uses the new generation of ceramic lamps to give 3200K tungsten colour temperature and CRI > 90 but with 4000 hour lamp life and very little heat. The ARRI X Ceramic 250 is the perfect fixture not only for smooth and cool background and fill lighting, but also for creating very hard shadows.



## EVENT SYSTEM

The ARRI EVENT Systems with multicore distribution and rack-mounted ballasts have set the standard for exhibitions, fashion shows, car shows or any event where high output, low wattage day-light sources are required.

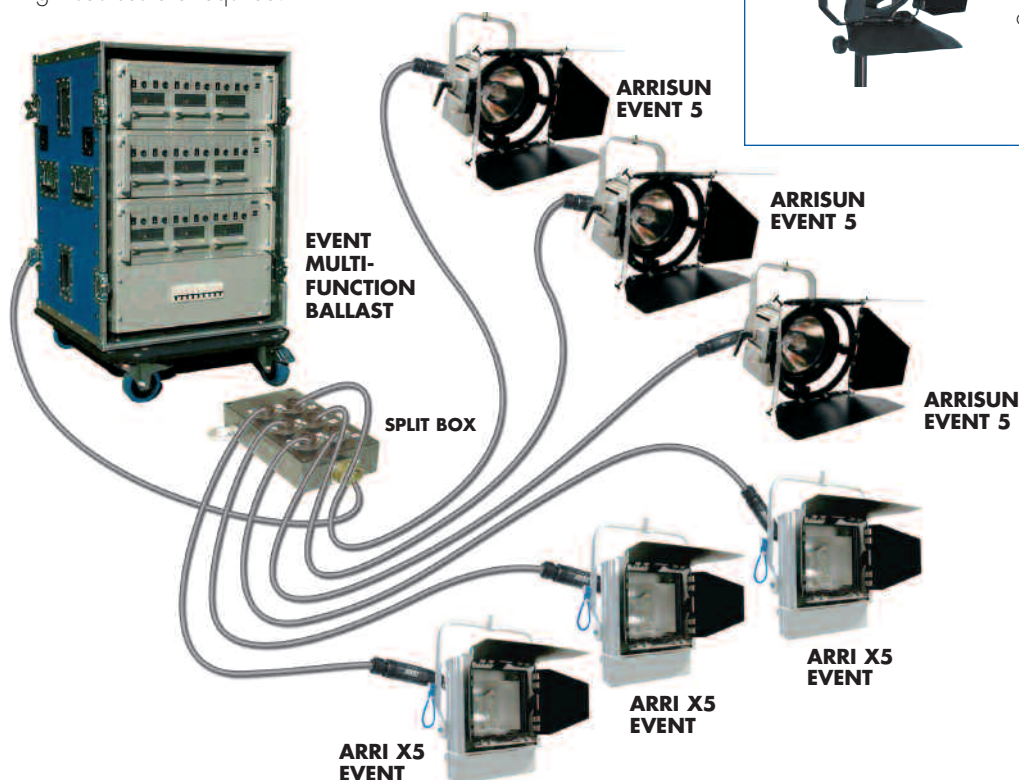

## DAYLIGHT

### DAYLIGHT

The DAYLIGHT range using double-ended daylight lamps has been the mainstay of the film industry for many years.



### COMPACT DAYLIGHT FRESNELS

Superior optical performance, reliability and robustness combined with light weight make these the standard for film lighting.



### ARRISUN

The ARRISUN DAYLIGHT PARs compliment the COMPACT DAYLIGHT FRESNEL range for location use.



### ARRI X

Lighting large areas with daylight has now been made easier with the ARRI X Series.



### ARRILUX POCKET PAR/ LITE DAYLIGHT

The LOW HEAT POCKET PARS and POCKET LITES are ideal where space is limited, for close ups or more difficult, confined set-ups.





## TUNGSTEN

### ARRI STUDIO

The ARRI STUDIO FRESNEL series is the ideal choice for TV and film studios where tungsten lampheads are required.

### ARRI JUNIOR

The ARRI JUNIOR FRESNEL series is ideal for use in portable applications where compact but robust, lightweight tungsten Fresnel spotlights are required.

### ARRILITE

The ARRILITES are open-face, focusing tungsten floodlights ideal for ENG (Electronic News Gathering), field production and fast turnaround location use.

### ARRI MINIFLOOD / MINICYC

The MINIFLOOD and asymmetric MINICYC complement the Arrilite & Spotlights. Ideal for small studios wherever large area coverage is required, but still small enough for location use.

### ARRISOFT

The TUNGSTEN ARRISOFT SOFTLIGHTS are well suited for small to medium studios and still small enough for location work wherever softlights are required.

### ARRI SOFTLIGHT


The ARRI TUNGSTEN SOFTLIGHTS, with their unique optical design and rugged construction, are ideal for medium to larger studios.

### CYC / FLOODLIGHT 1250 TUNGSTEN CYC LIGHT

The cyc product series covers five models. Four versions are offered with an asymmetrical reflector: the CYC 1250 as a Single, Double, 4-in line and a Cube setup. The FLOOD 1250 is a single fixture with a symmetrical reflector.

## THEATRE DAYLIGHT AND TUNGSTEN

Wherever the highest standards of theatre lighting is required, ARRI THEATRE lampheads have been developed for the special requirements of Theatre, Opera, Concerts and Festivals.

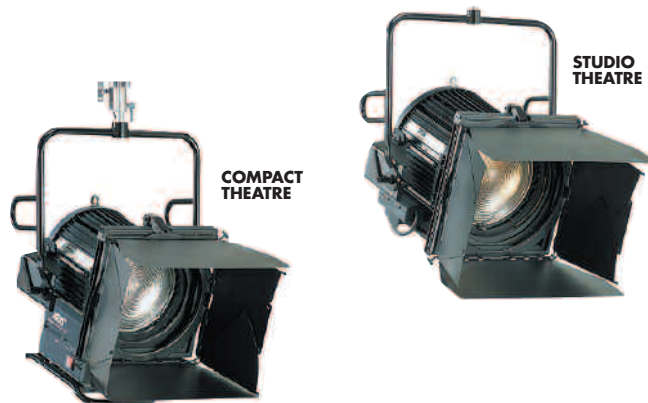

## FLUORESCENT STUDIO COOL

ARRI goes "Cool". With the ARRI STUDIO COOL Series. Introducing the most flexible studio fluorescent lighting available.



# welcome

**ARRI Grip is a comprehensive range of lighting stands and mounting equipment of the highest quality for film, TV and location applications.**

Innovative design combined with the latest production technology ensure the quality of these products and makes them worthy of the ARRI name. We listen to you, the practitioners, and adjust the designs accordingly. Recent innovations include time-saving quick-action clamps and folding frames that can be transported without removing the fabric then set up in seconds.



















The products embody practicality and professionalism at all levels, from the captive lock-offs that can't get lost, to the high efficiency brake shoe systems that operate whatever the weather. Precision manufacturing ensures that spares will fit and that parts can be interchanged between stands. Stainless, rust-proofed or aluminium tubes and castings are used throughout.

With the highest regard for safety, all equipment is designed to meet international regulations such as DIN 15560, TUV, CE and ISO.

With a range developed and expanded over more than 30 years, whatever your requirements,

**ARRI Grip has the perfect answer.**

## GUIDE TO SYMBOLS

	Minimum Height
	Maximum Height
	Closed Length
	Footprint Diameter
	Weight
	Maximum Evenly Distributed Load on Level Ground
	Maximum Load on Fully Extended Stand at 6° Inclination
	Spigot Size <sup>H</sup>
	Socket Size <sup>H</sup>
	Grip Head Size
	Top Tube Diameter
	Suggested Wheels
	Gravity Cast
	Black Option
	Air Cushioned Option
	Black Chrome Option
	17mm Stand Female Attachment Option
	German Safety Standard

<sup>H</sup> NOTE: in product specifications you will often see a note referring to the spigot/socket type of the product (e.g. "type 14"). This type number refers to the spigot and socket variants shown in Section 9.

## Ordering

Products may be ordered by using the product code together with its title.

Optional Black (**B**) finish, Air Cushioned (**AC**), Black Chrome (**CB**) finish and 17mm female attachment (**J**) versions are available where indicated.

Add **B**, **AC**, **CB** or **J** to the product code when ordering.

In order to maintain the highest standards, ARRI reserves the right to alter specifications without notice.






For stands with maximum load over 3kg, this brochure specifies, in accordance with DIN 15560 norm, the load when the stand is fully extended at an inclination of 6° from vertical.

DIN 15560 specifies the maximum load on a 'non-windup' stand is 18kg.

Optional wheels invalidate the height and load specifications according to DIN 15560.

# Contents

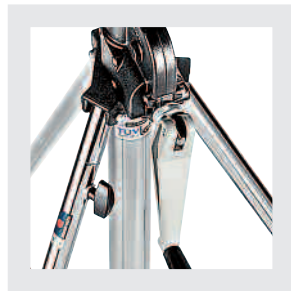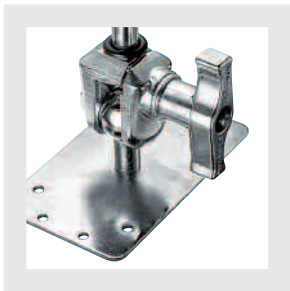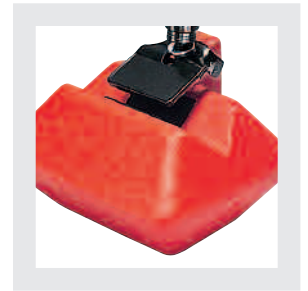

- 1 Stands**
- 2 Clamps**
- 3 Arms, Brackets & Bars**
- 4 Grip Head System**
- 5 Pump Cup & Wall Plates**
- 6 Lighting Booms**
- 7 Autopole System**
- 8 Lighting Control Mountings**
- 9 Adapters**
- 10 Index**





# Stands

**ARRI's range of stands consists of different product families which differ in design and materials depending both on the applications for which they are intended and on the type of light they support.**

To make reference to this section as easy and as useful as possible we have grouped the stands by family and load capacity: by knowing the weight of the light for which you need a stand you will be able to choose the one that matches your needs from the different versions.

A wide choice of complementary accessories adds further versatility to the stands range.



Baby Lightweight Stands	1.4
Stacker Stands	1.7
Junior Universal Stands	1.8
Roller Stands	1.11
Folding Base Stands	1.14
Combo Stands	1.15
Overhead Stands	1.18
Century Stands	1.20
Boom Stands	1.22
Wind Up Stands	1.24
Super Crank Stands	1.28
Super Crank Stand Accessories	1.31
Safe Crank Stand	1.32
Wincher Stand	1.34
Wheels for Stands	1.35
Stand Extensions	1.36
General Accessories	1.38



# Stands

- Our "Quick Guide" aims to help you choose the correct stand according to field of use.
- The "Stands" section of the catalogue is divided by family; each family is then subdivided and ordered by load capacity.

## Stacker Stands

Max payload 25kg



## Baby Lightweight Stands

Max payload 25kg



## Folding Base Stands

Max payload 40kg

## Roller Stands

Max payload 40kg



## Junior Stands

Max payload 40kg



## Overhead Stands

Max payload 40kg



## Century Stands

Max payload 10kg





## Quick Guide to stands



**Boom Stands**  
Max payload 30kg

**Super Crank Stands**  
Max payload 100kg



**Wind Up Stands**  
Max payload 80kg



**Combo Stands**  
Max payload 40kg



**Wincher Stand**  
Max payload 180kg



**Safe Crank Stand**  
Max payload 90kg



**Stand Extensions**

# Stands **Baby Lightweight Stands**

Hardworking versatile lightweights for kits, locations and in the studio!

## MAX payload 1-5kg

- Quick to set up and very stable.
- Column extension collars are pressure die cast aluminium.
- Double braced leg base for extra stability and safety.
- Choose between silver or black anodised aluminium finish or steel.
- Air cushioned feature optional as indicated (AC).
- Ideal for lighter weight film & video fixtures.
- They fold quickly to a compact size, fitting into most lighting kits.

### L2.76958.0 / LS.012B

#### BACKLITE STAND

📏 9cm
📏 85cm
📏 48cm
📏 60cm
📏 1.32kg
📏 3kg
📏 Base type 1+ Spigot LS.013
📏 Pole type 18 + type 19

LS.003 Black steel base with LS.122B detachable black aluminium column. 2 sections, 1 riser. Ø: 22, 19mm. Solid flat legs: 20 x 5mm. A versatile stand allowing fixtures to mount on the ground or on the included pole for extra height.

### L2.89275.0 / LS.052B

#### BLACK COMPACT STAND

📏 88cm
📏 250cm
📏 86cm
📏 109cm
📏 1.28kg
📏 5kg
📏 2.2kg@250cm
📏 Type 19
📏 LS.017

Aluminium stand. 3 sections, 2 risers. Ø: 25, 22, 19mm. Leg Ø: 19mm.

### L2.88985.0 / LS.001B

#### NANO STAND

📏 49cm
📏 190cm
📏 48cm
📏 100cm
📏 0.93kg
📏 1.5kg
📏 Type 19

Black aluminium stand. 5 sections, 4 risers. Ø: 25, 22, 19, 16, 13mm. Solid flat legs 15 x 5mm. An ideal stand for kits due to its compact design.

### L2.76976.0 / LS.2

#### BLACK MEDIUM KIT STAND (MAXI)

📏 106cm
📏 260cm
📏 88cm
📏 106cm
📏 1.4kg
📏 5kg
📏 16mm
📏 LS.018, LS.109, LS.110, LS.110G

Aluminium stand.

### L2.76965.0 / LS.01

#### BLACK COMPACT KIT STAND

📏 89cm
📏 260cm
📏 76cm
📏 106cm
📏 1.03kg
📏 5kg
📏 16mm
📏 LS.018, LS.109, LS.110, LS.110G

Aluminium stand.

### L2.76975.0 / LS.1

#### BLACK SMALL KIT STAND (MINI)

📏 73cm
📏 230cm
📏 67cm
📏 94cm
📏 1.20kg
📏 5kg
📏 16mm
📏 LS.018, LS.109, LS.110, LS.110G

Aluminium stand.



The picture shows the newly designed stand top attachment that we are going to introduce in the coming months. More stable than the old design, this top attachment does not have any 1/4" or 3/8" male thread.

## MAX payload 6-10kg

- Take a step up to the medium strength stands featuring robust design with heights from 91cm to 413cm.
- These stands are all constructed of steel allowing for heavier payloads plus greater durability. Most of the parts are field serviceable allowing less down-time.

### L2.89276.0 / LA.6030.B

#### MIDI-MAX KIT STAND

📏 91cm
📏 330cm
📏 90cm
📏 96cm
📏 2.2kg
📏 9kg
📏 1.8kg@330cm
📏 Type 21
📏 LS.018, LS.109, LS.110, LS.110G

Black aluminium stand. 4 sections, 3 risers.  
 Ø: 35, 30, 25, 20mm. Leg Ø: 22mm.  
 This stand features captive lock-off  
 T-knobs, high efficiency, brake shoe locking  
 risers and anodised black coating.

### L2.76977.0 / LS.3

#### BLACK LARGE KIT STAND (MASTER)

📏 109cm
📏 385cm
📏 107cm
📏 109cm
📏 2.15kg
📏 9kg
📏 0.9kg@385cm
📏 Type 19
📏 LS.018, LS.109, LS.110, LS.110G

Aluminium stand.  
 4 sections, 3 risers.  
 Ø: 35, 30, 25, 20mm.  
 Leg Ø: 22mm.

### L2.88059.0 / LA.4000.B

#### HEAVY DUTY BABY STAND DOUBLE RISER C/W LAZY LEG - BLACK

📏 112cm
📏 268cm
📏 95cm
📏 129cm
📏 3.5kg
📏 10kg
📏 8kg@268cm
📏 Type 33

Black aluminium stand.  
 3 sections, 2 risers.  
 Ø: 35, 30, 25mm.  
 Leg: 20 x 20mm.  
 1 levelling leg.

### L2.76984.0 / LS.003

#### BACKLITE BASE FEMALE ATTACHMENT

📏 9cm
📏 60cm
📏 1kg
📏 15kg
📏 Type 1+Spigot LS.013

Fold away base with 16mm female attachment and spigot.

### L2.88060.0 / LA.4010.B

#### HEAVY DUTY BABY STAND TRIPLE RISER

📏 132cm
📏 413cm
📏 115cm
📏 129cm
📏 4kg
📏 10kg
📏 2kg@413cm
📏 Type 33

Black aluminium stand.  
 4 sections, 3 risers.  
 Ø: 35, 30, 25, 20mm.  
 Leg: 20 x 20mm.  
 1 levelling leg.

### L2.88636.0 / LS.003M

#### MINI BACKLITE BASE MALE ATTACHMENT

📏 9.7cm
📏 40cm
📏 0.52kg
📏 10kg
📏 Type 33

The hole at the end of each leg enables the user to nail the stand to the floor, hang it on a wall or fix it to the ceiling.

### L2.89016.0 / LS.5051.BAC

#### MINI COMPACT STAND





# Stands **Baby Lightweight Stands**

Hardworking versatile lightweights for kits, locations and in the studio!

## MAX payload 11-25kg


- These stands are all constructed of steel allowing for heavier payloads plus greater durability. Most of the parts are field serviceable allowing less down-time.

### **L2.88065.0 / LA.4050.A**

#### MIGHTY BABY STAND

- ▲ 51cm
- ▲ 106cm
- ▲ 47cm
- ▲ 44cm
- ▲ 3.30kg
- ▲ 15kg
- ▲ 2kg@106cm
- ▲ Type 33

Chrome steel stand.  
3 sections, 2 risers.  
Ø: 35, 30, 25mm.  
Leg: 20 x 20mm.  
1 levelling leg.

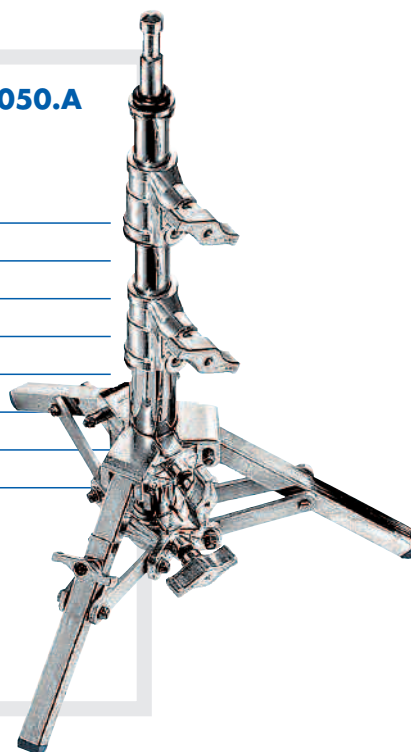


### **L2.88062.0 / LA.4016.J**

#### BABY J STAND

- ▲ 122cm
- ▲ 267cm
- ▲ 106cm
- ▲ 116cm
- ▲ 7kg
- ▲ 15kg
- ▲ 9kg@267cm
- ▲ Type 3

Chrome steel stand.  
3 sections, 2 risers.  
Ø: 35, 30, 25mm.  
Leg: 20 x 20mm.

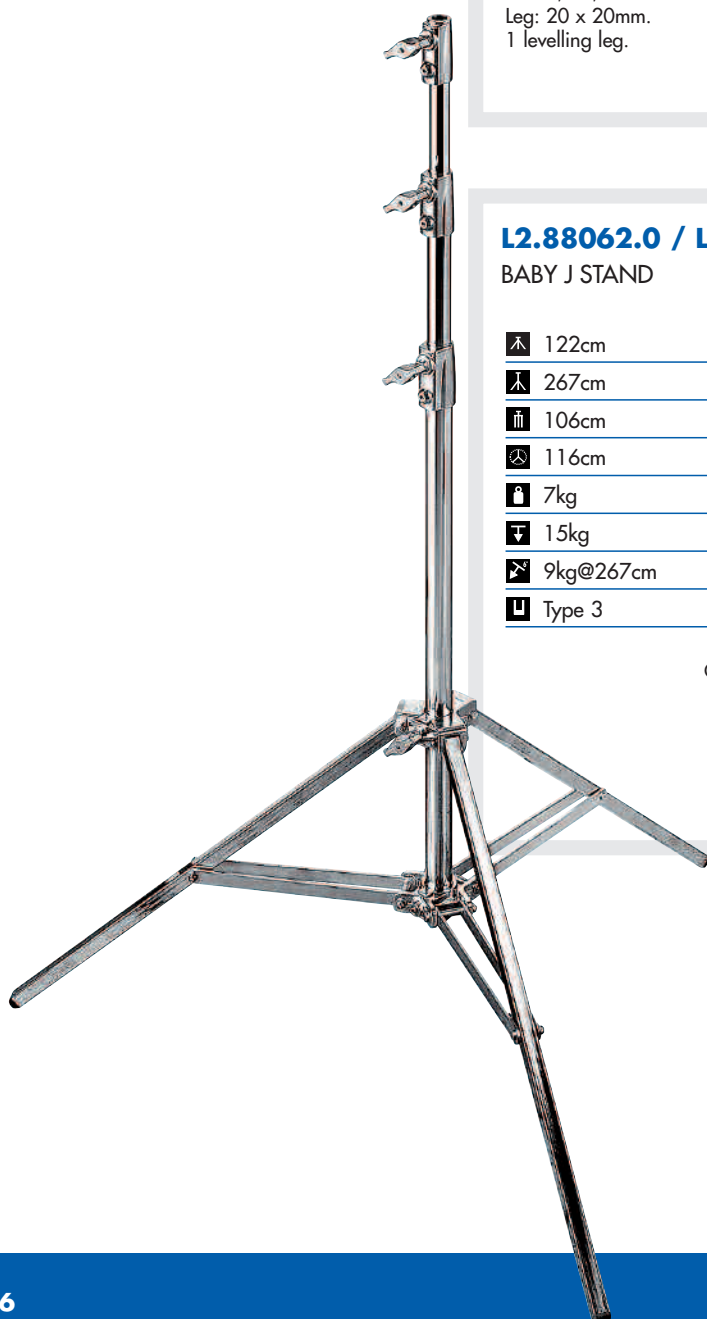

### **L2.88061.0 / LA.4010.C**

#### HIGH BABY STAND

- ▲ 132cm
- ▲ 413cm
- ▲ 115cm
- ▲ 129cm
- ▲ 6.1kg
- ▲ 25kg
- ▲ 4kg@413cm
- ▲ Type 33

Chrome steel stand. 4 sections, 3 risers.  
Ø: 35, 30, 25, 20mm.  
Leg: 20 x 20mm. 1 levelling leg.  
Fitted with grip truck mounts plus square legs, this high performance stand features double bracing.



## Stacker Stands

Innovative lightweight stacker stands that fold rather flat.

### MAX payload 25kg

- You can pack seven of our Stacker stands in the space of four equivalent products.
- Maximise your equipment room or grip truck space with these innovative Stacker stands.
- In another neat design plus, an in-built catch lets you clip 2, 3 or 4 stands together; add a shoulder strap for easy carrying and the limit is merely what weight you can manage.
- Chemical black anodised lightweight aluminium.
- Threaded hole for strap.

#### L2.89278.0 / LS.305B

##### SMALL STACKER STAND

	66cm
	217cm
	64cm
	79cm
	1.1kg
	4kg
	0.8kg@217cm
	Type 19

Black aluminium stand.  
4 sections, 3 risers.  
Ø 25, 22, 19, 16mm.  
Leg Ø: 19mm.

#### L2.89279.0 / LS.306B

##### MEDIUM STACKER STAND

	89cm
	250cm
	87cm
	108cm
	1.3kg
	5kg
	1.3kg@250cm
	Type 19

Black aluminium stand.  
3 sections, 2 risers.  
Ø 25, 22, 19mm.  
Leg Ø: 19mm.



#### L2.89277.0 / LS.307B

##### LARGE STACKER STAND

	112cm
	385cm
	110cm
	107cm
	2.3kg
	9kg
	0.8kg@385cm
	Type 19

Black aluminium stand.  
4 sections, 3 risers.  
Ø 35, 30, 25, 20mm.  
Leg Ø: 22mm.

# Stands Junior Universal Stands

Professional heavy duty stands for location or studio.

## MAX payload 10-15kg

- The workhorse of the industry for trouble free service on location and in the studio.
- Equally suitable for supporting reflectors or luminaires.
- Universal head type 14 with 28mm sockets plus either 16mm socket or "pop-up" 16mm stud.
- Stands for loads from 10kg to 40kg.
- All have levelling leg.
- Optional braked wheels.
- Chrome steel, black zinc and silver or black aluminium versions.
- Double braced leg base for extra stability and safety.
- Optional air cushioning as indicated (AC).

### L2.89280.0 / LS.008BU

#### BLACK ALU CINE STAND

📏 131cm
📏 212cm
📏 112cm
📏 118cm
📏 4.2kg
📏 15kg
📏 3.6kg@212cm
📏 Type 14
📏 LS.109, LS.110, LS.110G

Black aluminium stand.  
2 sections, 1 risers.  
Ø 35, 30mm.  
Leg Ø: 22mm.  
1 levelling leg.

### L2.88717.0 / LS.4

#### ALU SENIOR STAND (BLACK)

📏 124cm	📏 12kg
📏 315cm	📏 3.6kg@315cm
📏 122cm	📏 Type 14
📏 118cm	📏 LS.109, LS.110,
📏 3kg	LS.110G


Aluminium stand.  
3 sections, 2 risers.  
Ø 35, 30, 25mm.  
Leg Ø: 22mm.  
1 levelling leg.

### L2.89281.0 / LS.269HDBU

#### HIGH SUPER ALU STAND

📏 190cm
📏 730cm
📏 173cm
📏 174cm
📏 10kg
📏 10kg
📏 1kg@730cm
📏 Type 14
📏 LS.103, LS.104, LS.104G

Black aluminium stand.  
6 sections, 5 risers.  
Ø: 50, 45, 40, 35, 30, 25mm.  
Leg Ø: 30mm.  
1 levelling leg.

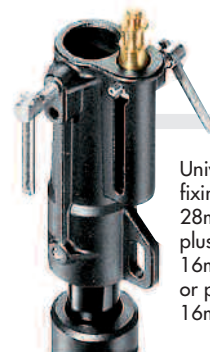

Universal top fixing type 14:  
28mm socket  
plus either  
16mm socket  
or pop - up  
16mm stud.



## MAX payload 16-30kg

### L2.88688.0 / LS.007CSU

B

#### SENIOR STAND

📏	124cm
📏	325cm
📏	122cm
📏	118cm
📏	7.3kg
📏	20kg
📏	6.7kg@325cm
📏	Type 14
📏	LS.109, LS.110, LS.110G

Chrome plated steel stand.  
3 sections, 2 risers.  
Ø: 35, 30, 25mm.  
Leg Ø: 22mm.  
1 levelling leg.

### L2.88993.0 / LS.111U

B

#### TALL STAND

📏	146cm
📏	380cm
📏	155cm
📏	102cm
📏	9kg
📏	25kg
📏	6kg@380cm
📏	Type 14
📏	LS.103, LS.104, LS.104G

Chrome plated steel stand.  
3 section, 2 risers. Ø: 35, 30, 25mm.  
Leg Ø: 22mm. 1 levelling leg.  
The small footprint makes this  
stand perfect for tight spaces.

### L2.89282.0 / LS.008BSU

#### BLACK STEEL CINE STAND

📏	132cm
📏	216cm
📏	116cm
📏	118cm
📏	6.4kg
📏	30kg
📏	18kg@216cm
📏	Type 14
📏	LS.110, LS.110G

Black steel stand.  
2 sections, 1 riser.  
Ø: 35, 30mm.  
Leg Ø: 22mm. 1 levelling leg.

### L2.89283.0 / LS.008CSU

#### CHROME STEEL CINE STAND

📏	132cm
📏	216cm
📏	116cm
📏	118cm
📏	6.4kg
📏	30kg
📏	18kg@216cm
📏	Type 14
📏	LS.110, LS.110G

Chrome steel stand.  
2 sections, 1 riser.  
Ø: 35, 30mm.  
Leg Ø: 22mm. 1 levelling leg.

### L2.89284.0 / LS.008XU

not illustrated

#### STAINLESS STEEL CINE STAND

📏	132cm
📏	216cm
📏	116cm
📏	118cm
📏	6.4kg
📏	30kg
📏	18kg@216cm
📏	Type 14
📏	LS.110, LS.110G

Stainless steel stand.  
2 sections, 1 riser.  
Ø: 35, 30mm.  
Leg Ø: 22mm. 1 levelling leg.

# Stands Junior Universal Stands

Professional heavy duty stands for location or studio.

**MAX payload 35-40kg**

## L2.89285.0 / LS.269BU

### SUPER ALU STAND

-  144cm
-  455cm
-  144cm
-  174cm
-  8kg
-  35kg
-  6.3kg@455cm
-  Type 14
-  LS.103, LS.104, LS.104G

Black aluminium stand. 4 sections, 3 risers. Ø: 50, 45, 40, 35mm. Leg Ø: 30mm. 1 levelling leg.

## L2.76979.0 / LS.5

### UNIVERSAL STEEL STAND

**B AC**

-  131cm
-  333cm
-  131cm
-  126cm
-  8.3kg
-  40kg
-  3kg@333cm
-  Type 14
-  LS.109, LS.110, LS.110G

Chrome plated steel stand. 3 sections, 2 risers. Ø: 40, 35, 30mm. Leg Ø: 22mm. 1 levelling leg.

## L2.89286.0 / LS.270U

### SUPER STEEL STAND

**B**

-  144cm
-  477cm
-  144cm
-  174cm
-  13.5kg
-  40kg
-  12kg@477cm
-  Type 14
-  LS.103, LS.104, LS.104G

Chrome plated steel stand. 4 sections, 3 risers. Ø: 50, 45, 40, 35mm. Leg Ø: 30mm. 1 levelling leg. There is a reason we call this the super stand! Incredible reach of 477cm that can support fixtures up to 40kg.

## L2.88728.0 / LS.7

### FOLLOW SPOT STAND

**B**

-  88cm
-  147cm
-  105cm
-  109cm
-  6.8kg
-  40kg
-  18kg@147cm
-  Type 14
-  LS.103, LS.104, LS.104G

Chrome plated stand. 2 sections, 1 riser. Ø: 50, 40mm. Leg Ø: 30mm. 1 levelling leg. Memory collar included. This stand was named for its low height and high payload allowing the lighting technician to easily follow an actor.

## L2.88725.0 / LS.626

### BLACK HEAVY DUTY STAND

-  153cm
-  330cm
-  131cm
-  126cm
-  8.3kg
-  40kg
-  3kg@330cm
-  Type 14
-  LS.109, LS.110, LS.110G

Black zinc plated stand. 3 sections, 2 risers. Ø: 40, 35, 30mm. Leg Ø: 22mm. 1 levelling leg.

## Roller Stands

Smooth-running studio performers.

### MAX payload 12kg

- All with low profile bases that slip easily into position on set.
- All stands supplied with free running wheels and positive brakes.
- Available with several attachment options.

#### L2.89287.0 / LS.299B

##### BABY STUDIO STAND

- ▲ 108cm
- ▲ 272cm
- 105cm
- ⌚ 75cm
- 📦 4.8kg
- ⬇️ 12kg
- 📏 2.2kg@272cm
- 📏 Type 3 + Spigot LS.013

Black steel base, black anodised aluminium sections, complete with wheels.  
3 sections, 2 risers.  
Ø: 35, 30, 25mm.  
1 levelling leg.

#### L2.88063.0 / LA.4020.A

##### BABY ROLLER STAND

- ▲ 124cm
- ▲ 297cm
- 118cm
- ⌚ 106cm
- 📦 6.4kg
- ⬇️ 12kg
- 📏 5kg@297cm
- 📏 Type 33

Legs and column in steel, risers in aluminium, complete with wheels.  
3 sections, 2 risers.  
Ø: 35, 30, 25mm.  
Leg: 20 x 20mm.

#### L2.88064.0 / LA.4030.A

##### HIGH BABY ROLLER STAND

- ▲ 138cm
- ▲ 430cm
- 134cm
- ⌚ 106cm
- 📦 6.9kg
- ⬇️ 12kg
- 📏 1kg@430cm
- 📏 Type 33

Legs and column in steel, risers in aluminium, complete with wheels.  
4 sections, 3 risers.  
Ø: 35, 30, 25, 20mm.  
Leg: 20 x 20mm.

#### L2.88074.0 / LA.6060.A

##### BABY FOLDING BASE STUDIO STAND

- ▲ 108cm
- ▲ 250cm
- 98cm
- ⌚ 75cm
- 📦 6kg
- ⬇️ 12kg
- 📏 2.3@250cm
- 📏 Type 33

Legs and column in steel, risers in aluminium, complete with wheels.  
3 sections, 2 risers.  
Ø: 35, 30, 25mm.  
1 levelling leg.



# Stands **Roller Stands**

Smooth-running studio performers.

**MAX payload 12-20kg**

## **L2.88075.0 / LA.6065.A**

HIGH BABY FOLDING BASE  
STUDIO STAND

115cm

330cm

105cm

75cm

6.3kg

12kg

1.8kg@330cm

Type 33

Legs and column in steel, risers in aluminium, complete with wheels.  
4 sections, 3 risers.  
Ø: 35, 30, 25, 20mm.  
1 levelling leg.

## **L2.89288.0 / LS.298B**

ALU-STUDIO STAND

129cm

300cm

125cm

100cm

6kg

15kg

5kg@300cm

Type 14

Black steel base, black anodised aluminium sections, complete with wheels. 3 sections, 2 risers.  
Ø: 35, 30, 25mm. 1 levelling leg.

## **L2.88078.0 / LA.6090.A**

HIGH JUNIOR FOLDING  
BASE STUDIO STAND

130cm

340cm

124cm

100cm

10.7kg

20kg

3kg@340cm

Type 34

Legs and column in steel, risers in aluminium, complete with wheels.  
4 sections, 3 risers.  
Ø: 45, 40, 35, 30mm.  
1 levelling leg.

## **L2.88709.0 / LS.297**

STEEL STUDIO STAND

123cm

207cm

120cm

100cm

6.8kg

20kg

12kg@207cm

Type 14

Black steel base, chrome steel sections, complete with wheels.  
2 sections, 1 riser.  
Ø: 35, 30mm.  
1 levelling leg.

## MAX payload 25-40kg

### L2.88076.0 / LA.6080.A

LOWBOY JUNIOR FOLDING BASE  
STUDIO STAND

80cm

122cm

70cm

75cm

8kg

25kg

3.5kg@122cm

Type 34

Legs and column in steel, risers in  
aluminium, complete with wheels.  
3 sections, 2 risers.  
Ø: 45, 40, 35mm.  
1 levelling leg.

### L2.88071.0 / LA.5000.A

HIGH JUNIOR (TRIPLE)  
ROLLER STAND

146cm

428cm

142cm

129cm

15.4kg

40kg

5.5kg@428cm

Type 34

Chrome steel stand, complete  
with wheels.  
4 sections, 3 risers.  
Ø: 45, 40, 35, 30mm.  
Leg: 25 x 25mm.

### L2.88072.0 / LA.5010.A

JUNIOR ROLLER STAND (DOUBLE)

134cm

360cm

130cm

129cm

13.6kg

40kg

7kg@360cm

Type 34

Chrome steel stand, complete with wheels.  
3 sections, 2 risers.  
Ø: 45, 40, 35mm.  
Leg: 25 x 25mm.

# Stands **Folding Base Stands**

Folding Base Stands - running studio performers!

## MAX payload 40kg

- These bases can be used for backlights of most sizes.
- Simply add a century stand column to create your own rolling stand.
- For leg storage folds up in a small package.
- Universal head with 28mm sockets plus either 16mm socket or "pop-up" spigot.
- Low profile base that slips easily into position on sets.
- Leg levelling feature.

### L2.88077.0 / LA.6085.B

#### BRAKE BASE SMALL

📏 28cm	
📏 36cm	
📏 75cm	
📏 4.8kg	
📏 40kg	
📏 Type 14	

1 levelling leg.  
Complete with braked wheels.




### L2.89290.0 / LS.299FBASE

#### FOOT BASE SMALL

📏 21cm	
📏 36cm	
📏 75cm	
📏 3.5kg	
📏 40kg	
📏 Type 14	

1 levelling leg.  
Complete with feet.

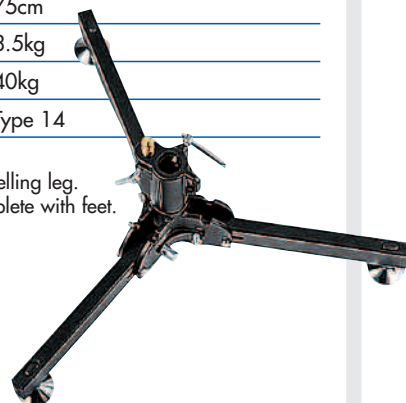

### L2.88079.0 / LA.6095.B

#### BRAKE BASE LARGE

📏 28cm	
📏 52cm	
📏 100cm	
📏 5.7kg	
📏 40kg	
📏 Type 14	

1 levelling leg.  
Complete with braked wheels.




### L2.89289.0 / LS.297FBASE

#### FOOT BASE LARGE

📏 21cm	
📏 52cm	
📏 100cm	
📏 4.4kg	
📏 40kg	
📏 Type 14	

1 levelling leg.  
Complete with feet.

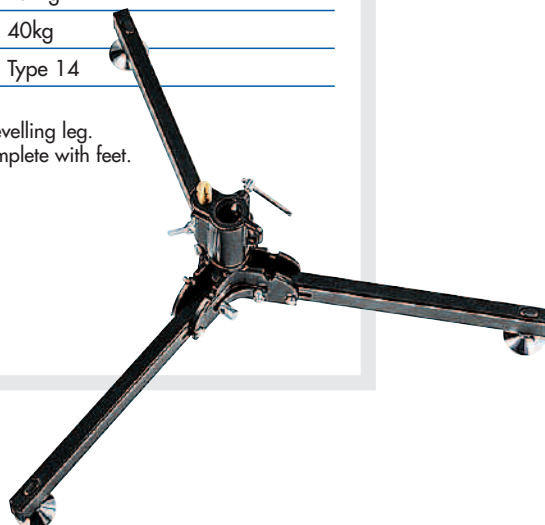



## MAX payload 25kg


- Equally suitable for supporting reflectors or luminaires.
- Choice of black anodised aluminium or chromed steel construction.
- Double braced leg base for extra stability and safety.
- Captive lock offs thread into rust free steel inserts.
- All versions have levelling leg for easy positioning and stability.
- Optional braked wheels.

### L2.88688.0 / LS.007CSU<sup>CB</sup>

#### STEEL SENIOR STAND

	124cm
	325cm
	122cm
	118cm
	7.3kg
	20kg
	6.7kg@315cm
	Type 14
	LS.110G, LS.109, LS.110

Chrome plated steel stand.  
3 sections, 2 risers.  
Ø: 35, 30, 25mm.  
Leg Ø: 22mm. 1 levelling leg.

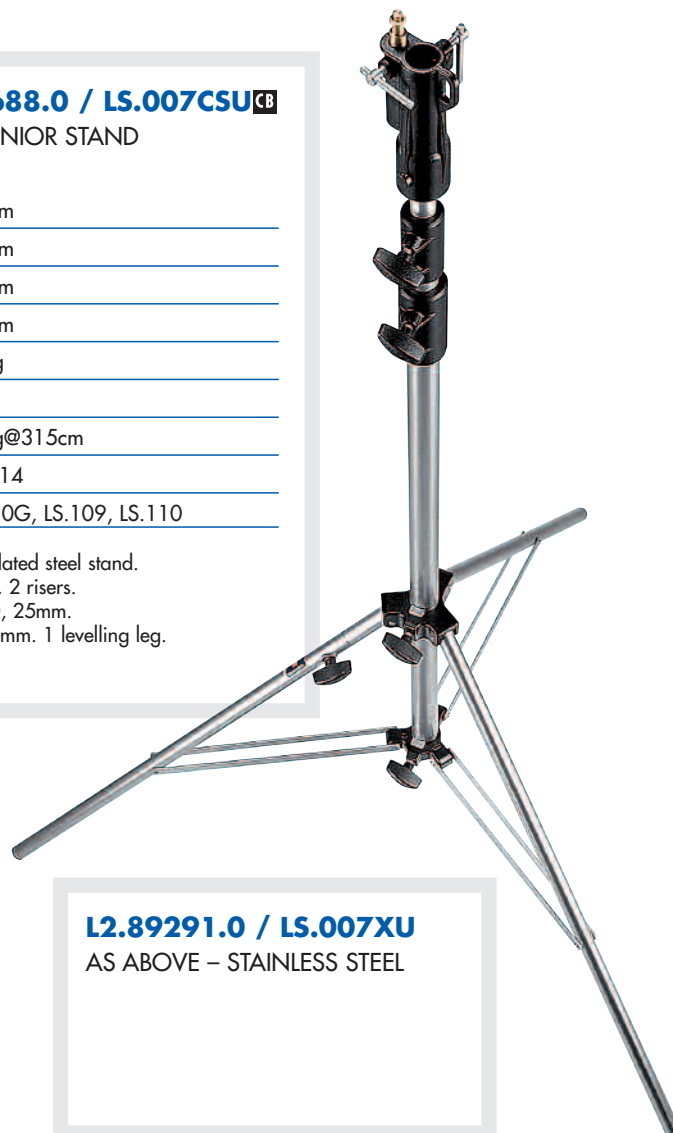

### L2.88030.0 / LA.1025.B

#### BLACK LOW ALU COMBO STAND

	110cm
	198cm
	93cm
	80cm
	6kg
	25kg
	3kg@198cm
	Type 34
	LA.90000.B

Aluminium legs with aluminium risers.  
3 sections, 2 risers.  
Ø: 45, 40, 35mm.  
Leg: 25 x 25mm.  
1 levelling leg.



### L2.89291.0 / LS.007XU

#### AS ABOVE – STAINLESS STEEL



Universal top fixing type  
34: 28mm socket plus  
either 16mm socket or  
pop - up 16mm stud.

# Stands **Combo Stands**

**MAX payload 30kg**

## **L2.88026.0 / LA.1015.B**

ALU COMBO DOUBLE RISER

-  158cm
-  325cm
-  134cm
-  135cm
-  6.2kg
-  30kg
-  7kg@325cm
-  Type 34
-  LA.90000.B

Aluminium legs with aluminium risers.  
3 sections, 2 risers. Ø: 45, 40, 35mm.  
Leg: 25 x 25mm. 1 levelling leg.

## **L2.88023.0 / LA.1005.B**

ALU COMBO TRIPLE RISER

-  167cm
-  408cm
-  143cm
-  135cm
-  6.9kg
-  30kg
-  2.5kg@408cm
-  Type 34
-  LA.90000.B

Aluminium legs with aluminium risers.  
4 sections, 3 risers. Ø: 45, 40, 35, 30mm.  
Leg: 25 x 25mm. 1 levelling leg.



## **L2.88073.0 / LA.6050.A**

CINE COMBO STAND

-  118cm
-  220cm
-  116cm
-  118cm
-  7.5kg
-  30kg
-  7kg@220cm
-  Type 34
-  LS.110G

Chrome steel stand.  
2 sections, 1 riser.  
Ø: 35, 30mm.  
Leg Ø: 22mm.  
1 levelling leg.




## **L2.88028.0 / LA.1022.A**

MINI LOW COMBO STAND

-  94cm
-  141cm
-  83cm
-  80cm
-  5.9kg
-  30kg
-  10kg@141cm
-  Type 34
-  LA.90000.A

Legs and column in steel.  
Riser in aluminium.  
2 sections, 1 riser.  
Ø: 45, 40mm.  
Leg: 25 x 25mm.  
1 levelling leg.

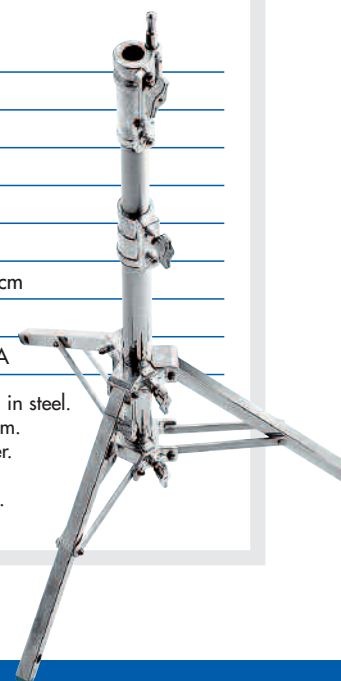

# Stands **Overhead Stands**

Support your 'butterfly' material in a stable position.

## MAX payload 30-40kg


- Overhead stands are designed to support butterfly frames and backdrops, but their use is virtually limitless due to their high reach and wide base.
- The top of the stand is fitted with a 115cm grip head, which accepts the butterfly ears; and a 28mm socket for fixtures with a junior pin. The stands with wheels have a special casting to protect the wheels during storage.
- Wide base for greatest stability at maximum heights.
- Legs may be locked partially open for working in tight environments.
- Roller versions fitted with efficient braked wheels.

### L2.88058.0 / LA.3030.A

#### SUPER HIGH OVERHEAD STAND

🚶	240cm
🚶	808cm
🚶	203cm
🚶	198cm
🚶	21kg
🚶	30kg
🚶	1kg@808cm
🚶	28mm
🚶	115mm

Chrome steel stand.  
5 sections, 4 risers.  
Ø: 50, 45, 40, 35, 30mm.  
Leg Ø: 35mm.  
1 levelling leg.

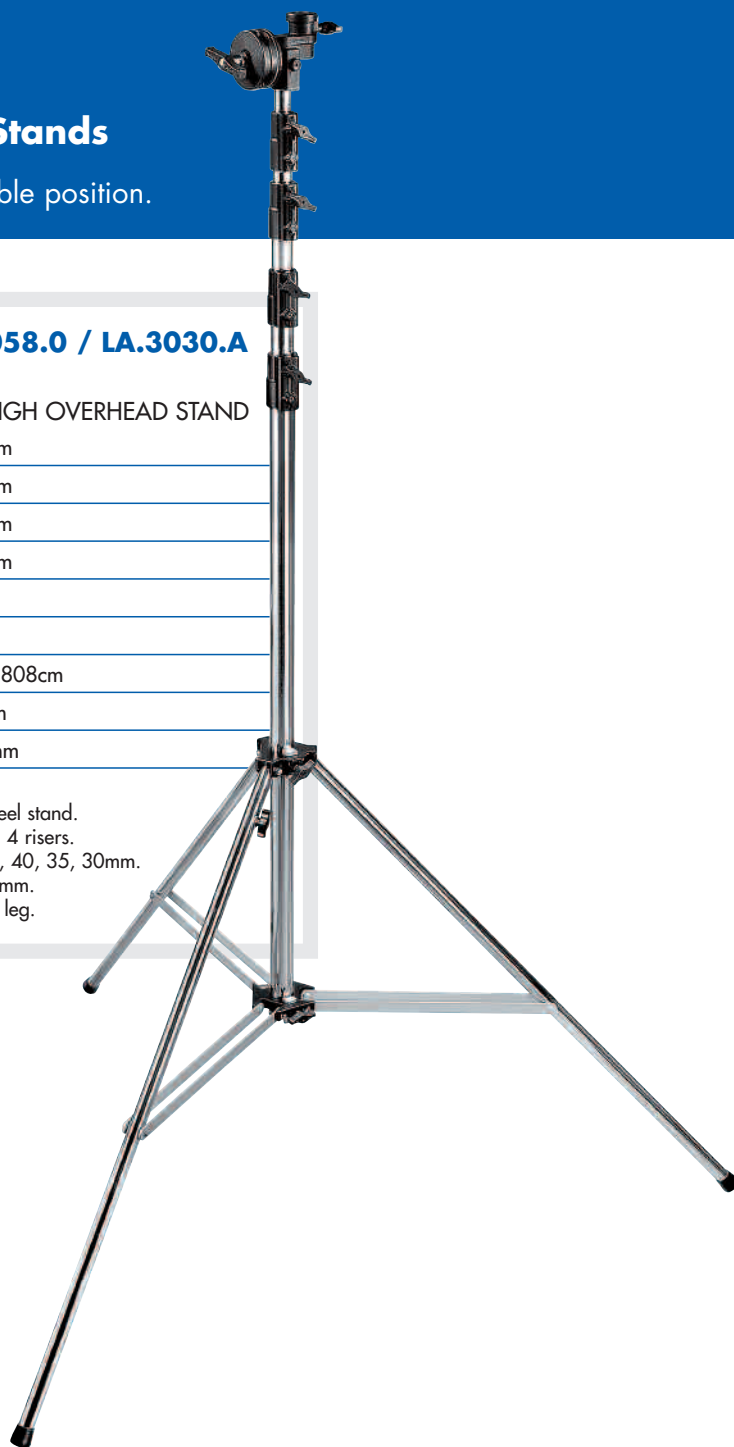

### L2.88057.0 / LA.3020.A

#### HI-HI WALKER STAND -WIDE BASE

🚶	199cm
🚶	557cm
🚶	195cm
🚶	196cm
🚶	16.8kg
🚶	40kg
🚶	9.5kg@557cm
🚶	28mm
🚶	115mm
🚶	LA.90000.A

Chrome steel stand.  
4 sections, 3 risers.  
Ø: 45, 40, 35, 30mm.  
Leg: 25 x 25mm. 1 levelling leg.



Multi-function head with  
115mm grip head and  
28mm socket.

## L2.88055.0 / LA.3010.A

not illustrated

### MEDIUM ROLLER TRIPLE RISER WITH WHEELS

152cm

432cm

150cm

154cm

16kg

40kg

5kg@423cm

28mm

115mm

Chrome steel stand complete with braked wheels. 4 sections, 3 risers. Ø: 45, 40, 35, 30mm. Leg: 25 x 25mm.

## L2.88053.0 / LA.3000.A

### HI-HI ROLLER TRIPLE RISER WITH WHEELS

186cm

597cm

182cm

154cm

18.3kg

40kg

28mm

115mm

Chrome steel stand complete with braked wheels. 4 sections, 3 risers. Ø: 45, 40, 35, 30mm. Leg: 25 x 25mm. Important! Counterweight sandbags must always be used on the legs to ensure safe, stable operation even at full height extension.

## L2.88056.0 / LA.3012.A

not illustrated

### MEDIUM TRIPLE RISER WALKER STAND

143cm

423cm

135cm

129cm

11.8kg

40kg

4.5kg@423cm

28mm

115mm

LA.90000.A

Chrome steel stand. 4 sections, 3 risers. Ø: 45, 40, 35, 30mm. Leg: 25 x 25mm.

## L2.88054.0 / LA.3002.A

not illustrated

### HI-HI TRIPLE RISER WALKER STAND

177cm

588cm

167cm

129cm

14kg

40kg

1kg@588cm

28mm

115mm

LA.90000.A

Chrome steel stand. 4 sections, 3 risers. Ø: 45, 40, 35, 30mm. Leg: 25 x 25mm.





# Stands Century Stands

The first choice when it comes to supporting flags and scrims but equally at home supporting luminaires.

- 20", 30", 40" and 60" stands - heights up to 482cm with loads up to 10kg.
- Fold away, spring loaded legs with unique mounts which are easy to replace.
- Deep inset plastic feet that do not come off in use.
- High quality finish resists all weather conditions.
- Detachable base stand - also available as turtle base only.
- Captive "T" handles.



CENTURY STAND

## Fixed base

**L2.88050.0/LA.2080.A** not illustrated

20" MINI BASE CENTURY STAND

84cm	4kg
175cm	7kg
84cm	1kg@175cm
75cm	Type 33
CB J B	

**L2.88041.0/LA.2055.A** not illustrated

20" CENTURY STAND

84cm	4.3kg
175cm	8kg
84cm	8kg@175cm
95cm	Type 33
CB J B	

**L2.88038.0/LA.2035.A** not illustrated

30" CENTURY STAND

110cm	4.8kg
253cm	10kg
110cm	2kg@253cm
95cm	Type 33
CB J B	

**L2.88032.0/LA.2005.A** not illustrated

40" CENTURY STAND

134cm	5.5kg
328cm	10kg
134cm	0.5kg@328cm
95cm	Type 33
CB J B	

**L2.88033.0/LA.2008.A**

60" CENTURY STAND

185cm	6.8kg
482cm	10kg
185cm	Type 33
95cm	
CB J B	

## Sliding leg

**L2.88051.0/LA.2085.A** not illustrated

20" MINI BASE CENTURY STAND

84cm	4kg
175cm	7kg
84cm	1kg@175cm
75cm	Type 33
CB J B	

**L2.88042.0/LA.2056.A** not illustrated

20" SLIDING LEG CENTURY STAND

84cm	4.3kg
175cm	8kg
84cm	8kg@175cm
95cm	Type 33
CB J B	

**L2.88039.0/LA.2045.A** not illustrated

30" SLIDING LEG CENTURY STAND

110cm	4.8kg
253cm	10kg
110cm	2kg@253cm
95cm	Type 33
CB J B	

**L2.88034.0/LA.2015.A** not illustrated

40" SLIDING LEG CENTURY STAND

134cm	5.5kg
328cm	10kg
134cm	0.5kg@328cm
95cm	Type 33
CB J B	

**L2.88035.0/LA.2018.A**










60" SLIDING LEG CENTURY STAND

185cm	6.8kg
482cm	10kg
185cm	Type 33
95cm	
CB J B	

## Detachable base

**L2.88052.0/LA.2090.A** not illustrated










20" MINI BASE CENTURY STAND

 84cm	 5.2kg
 155cm	 7kg
 84cm	 1kg@155cm
 75cm	 Type 33 + type 35
	 28mm

CB J B

**L2.88043.0/LA.2057.A** not illustrated










20" CENTURY STAND

 84cm	 5.6kg
 155cm	 10kg
 84cm	 8kg@155cm
 95cm	 Type 33 + type 35
	 28mm

CB J B

**L2.88040.0/LA.2047.A** not illustrated










30" CENTURY STAND

 110cm	 5.8kg
 253cm	 10kg
 110cm	 2kg@253cm
 95cm	 Type 33 + type 35
	 28mm

CB J B

**L2.88036.0/LA.2025.A** not illustrated









40" CENTURY STAND

 134cm	 6.2kg
 300cm	 10kg
 134cm	 0,5kg@300cm
 95cm	 Type 33 + type 35
	 28mm

CB J B

**L2.88037.0/LA.2028.A**

60" CENTURY STAND






 185cm	 7.55kg
 454cm	 10kg
 185cm	 Type 33 + type 35
 95cm	 28mm

CB J B

## Double riser columns

**L2.88048.0/LA.2075.A** not illustrated






20" DOUBLE RISER COLUMN

 68cm	
 139cm	
 2.2kg	
 Type 33 + type 35	
	 28mm

CB J B

**L2.88047.0/LA.2072.A** not illustrated






30" DOUBLE RISER COLUMN

 95cm	
 206cm	
 2.8kg	
 Type 33 + type 35	
	 28mm

CB J B

**L2.88046.0/LA.2070.A** not illustrated






40" DOUBLE RISER COLUMN

 118cm	
 285cm	
 3.3kg	
 Type 33 + type 35	
	 28mm

CB J B

**L2.88049.0/LA.2078.A**

60" DOUBLE RISER COLUMN






 169cm	
 438cm	
 4.5kg	
 Type 33 + type 35	
	 28mm

CB J B

## Turtle bases

**L2.88045.0/LA.2068.A** not illustrated






MINI TURTLE BASE

 27cm	
 75cm	
 2.7kg	
 28mm	
	 28mm


CB

**L2.88044.0/LA.2065.A**

TURTLE BASE

 27cm	
 95cm	
 3kg	
 28mm	
	 28mm

CB

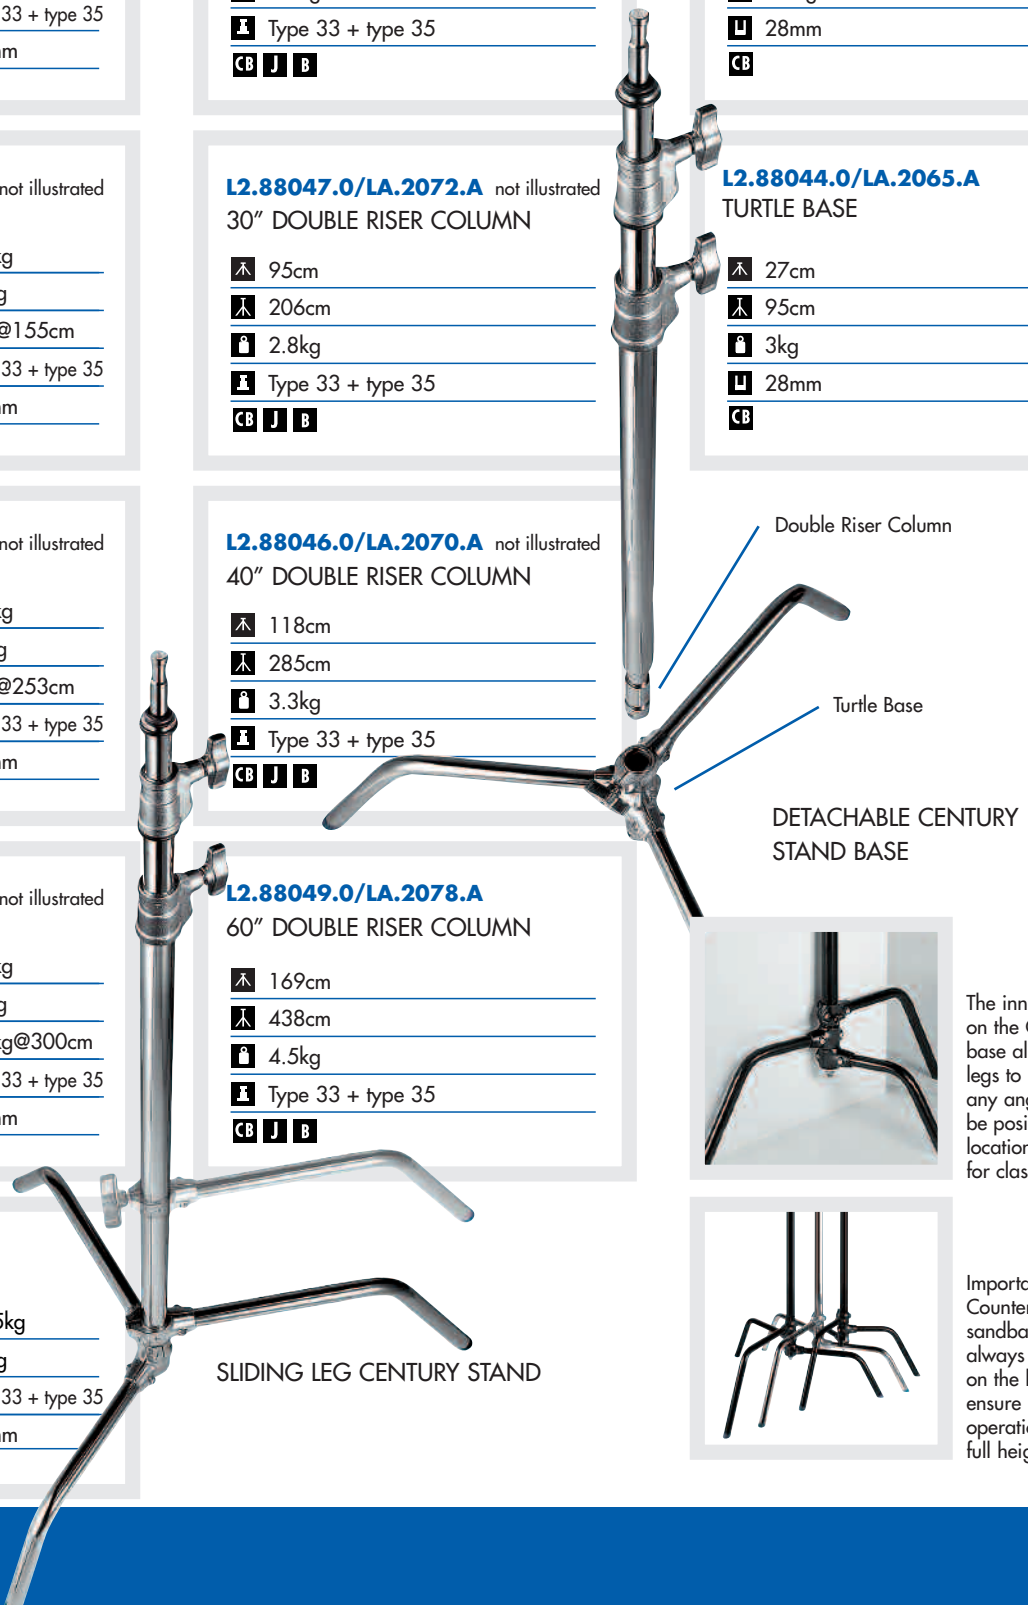

Double Riser Column

Turtle Base

DETACHABLE CENTURY  
STAND BASE

The innovative design on the Century stand base allows individual legs to be set at any angle, and can be positioned in locations not possible for classic stands.

Important!  
Counterweight sandbags must always be used on the legs to ensure safe, stable operation even at full height extension.

# Stands **Boom Stands**

A stand and a boom, all in one!!!

## MAX payload 30kg

- Using a special articulated joint which works both as a locking collar and as a pivoting boom clamp, all ARRI upright boom stands can rapidly be converted into stands with horizontal boom arms.
- Our unique boom stands are the perfect answer to those who need the flexibility of a boom and a light stand in one unit. Available in lightweight aluminium and steel for any type of shoot.
- Equipped with the most popular light attachments: 16mm pin, 16mm and 28mm sockets.

### L2.89292.0 / LS.420B

COMBI-BOOM STAND  
(WITH SANDBAG)

📏	131cm
📏	392cm
📏	113cm
📏	109cm
📏	2.7kg
📏	9kg
📏	0.9kg@392cm
📏	Type 25 + Spigot LS.013
📏	LS.018

Black aluminium stand.  
Supplied with sandbag counterweight (empty) for maximum stability and smoothness.

4 sections, 3 risers.

Ø: 35, 30, 25, 20mm.

Leg Ø: 22mm.

Minimum extension boom: 19cm.

Maximum extension boom: 191cm.

Maximum load at boom full extension:  
2kg with counterweight.



### L2.89293.0 / LS.420CSU

HD COMBI BOOM (WITH SANDBAG)

📏	5.6kg
📏	12kg
📏	1.5kg@392cm

Legs and column in chrome steel and top two sections in aluminium.

Supplied with sandbag counterweight (empty) for maximum stability and smoothness.

4 sections, 3 risers.

Ø: 35, 30, 25, 20mm.

Leg Ø: 22mm.

Minimum extension boom: 19cm.

Maximum extension boom: 191cm.


Maximum load at boom full extension:  
5kg with 35kg counterweight.



Boom Stand Attachment




Boom Stand Pivoting Collar



The industry workhorse, for trouble free service on location and in the studio.

## MAX payload 35-40kg

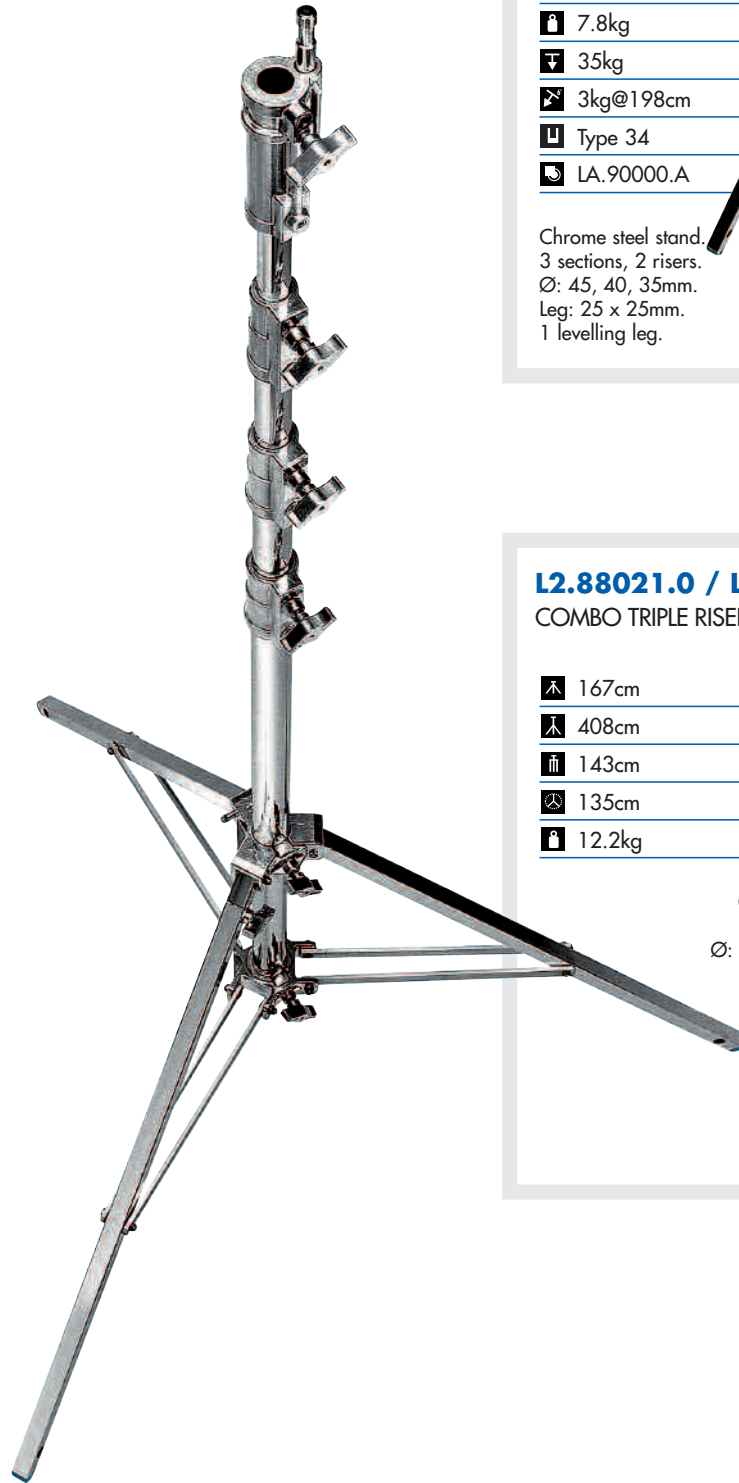


### L2.88027.0 / LA.1020.A

#### LOW BOY COMBO STAND

📏 101cm
📏 198cm
📏 93cm
📏 80cm
⚖️ 7.8kg
⬇️ 35kg
📏 3kg@198cm
📏 Type 34
🔧 LA.90000.A

Chrome steel stand.  
3 sections, 2 risers.  
Ø: 45, 40, 35mm.  
Leg: 25 x 25mm.  
1 levelling leg.

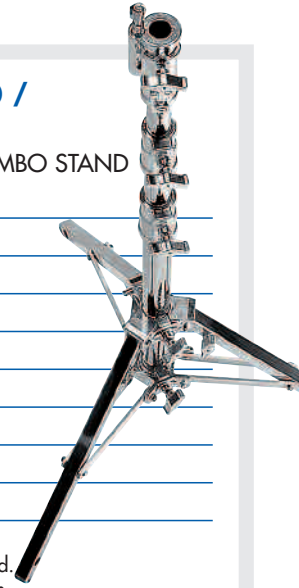


### L2.88024.0 / LA.1010.A

#### COMBO DOUBLE RISER

📏 158cm
📏 325cm
📏 134cm
📏 135cm
⚖️ 11kg
⬇️ 40kg
📏 15kg@325cm
📏 Type 34
🔧 LA.90000.A

Chrome steel stand.  
3 sections, 2 risers.  
Ø: 45, 40, 35mm.  
Leg: 25 x 25mm.  
1 levelling leg.

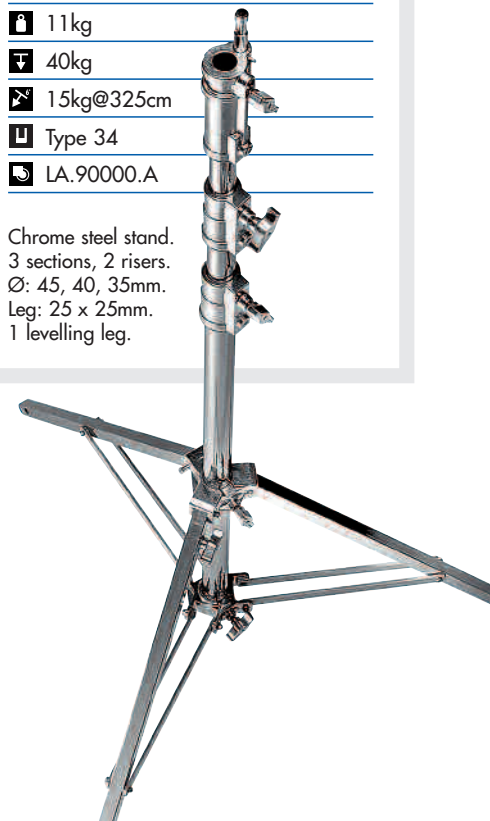

### L2.88021.0 / LA.1000.A

#### COMBO TRIPLE RISER

📏 167cm	⬇️ 40kg
📏 408cm	📏 7kg@408cm
📏 143cm	📏 Type 34
📏 135cm	🔧 LA.90000.A
⚖️ 12.2kg	

Chrome steel stand.  
4 sections, 3 risers.  
Ø: 45, 40, 35, 30mm.  
Leg: 25 x 25mm.  
1 levelling leg.

### L2.88031.0 / LA.1028.A

#### ULTRA LOW COMBO STAND

📏 45cm
📏 68cm
📏 56cm
📏 56cm
⚖️ 3.65kg
⬇️ 35kg
📏 16mm
📏 28mm
🔧 LA.90000.A

Chrome steel stand.  
Leg: 25 x 25mm  
1 levelling leg



## Boom Stands

### L2.88067.0 / LA.4075.A

#### BABY COMBI-BOOM STAND

-  139cm
-  413cm
-  124cm
-  129cm
-  4.6kg
-  10kg
-  2.5kg@413cm
-  Type 33

Supplied with sandbag counterweight (empty) for maximum stability and smoothness.  
Black aluminium stand.  
4 sections, 3 risers.  
Ø: 35, 30, 25, 20mm.  
Leg: 20 x 20mm.  
1 levelling leg.  
Min extension boom  
113cm - Max load 15kg.  
Max extension boom  
213cm - Max load 5kg.

### L2.88080.0 / LA.7000.0

#### JUNIOR BOOM STAND

-  188cm
-  500cm
-  165cm
-  135cm
-  15kg
-  30kg
-  4kg@500cm
-  Type 34
-  LA.90000.A

Chrome steel stand.  
4 sections, 3 risers.  
Ø: 45, 40, 35, 30mm.  
Leg: 25 x 25mm.  
1 levelling leg.  
Min extension boom  
155cm - Max load 30kg.  
Max extension boom  
266cm - Max load 8kg.

### L2.88066.0 / LA.4070.A

#### BABY STEEL COMBI-BOOM STAND

-  131cm
-  392cm
-  113cm
-  109cm
-  8.4kg
-  12kg
-  3kg@392cm
-  Type 33
-  LA.90000.A

Chrome steel stand.  
4 sections, 3 risers.  
Ø: 35, 30, 25, 20mm.  
Leg: 20 x 20mm.  
1 levelling leg.

# Stands **Wind Up Stands**

High and mighty wind-ups that set the industry standard.

## MAX payload 30kg


- Chrome or stainless steel, single and double risers which extend simultaneously.
- Fold away crank handle.
- Third internal safety cable ensures simultaneous retrieval of all risers.
- Levelling leg for easy positioning and stability.
- Double braced leg base for extra stability and safety.

### L2.89294.0 / LB.201

SHORT WIND-UP STAND  
WITH BRAKED WHEELS

- 📏 181cm
- 📏 390cm
- 📏 201cm
- 📏 142cm
- 📏 24kg
- 📏 30kg
- 📏 10kg@390cm
- 📏 Type 14

Chrome steel stand.  
3 sections, 2 risers.  
Ø: 55, 45, 38mm.  
Leg Ø: 30mm.  
1 levelling leg.

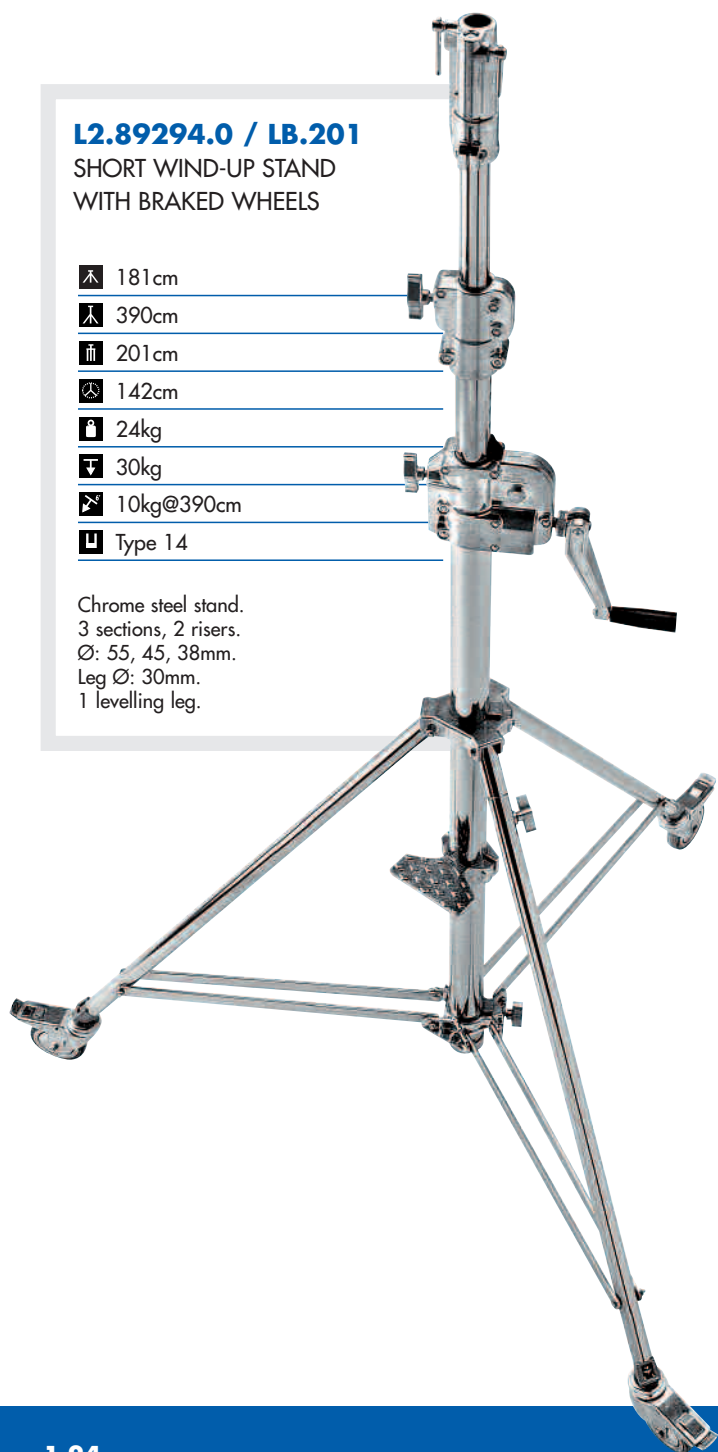

### L2.88970.0 / LB.2000.A

WIND-UP STAND WITH BRAKED  
WHEELS

- 📏 181cm
- 📏 390cm
- 📏 201cm
- 📏 142cm
- 📏 24kg
- 📏 30kg
- 📏 9kg@390cm
- 📏 Type 14

Chrome steel stand.  
3 sections, 2 risers.  
Ø: 55, 45, 38mm.  
Leg Ø: 30mm.  
1 levelling leg.



### L2.88670.0 / LS.087

B

#### 3 SECTION WIND-UP STAND

📏	167cm
📏	370cm
📏	181cm
📏	128cm
📏	21.4kg
📏	30kg
📏	30kg@370cm
📏	Type 14
📏	LS.104, LS.104G, LB.9000.10

Chrome steel stand with geared column.  
2 risers extend simultaneously at an elevation of 4.4cm per handle turn.  
Safety cable ensures simultaneous retrieval of all sections.  
3 sections, 2 risers  
Ø: 55, 45, 38mm.  
Leg Ø: 30mm.  
1 levelling leg.



### L2.76955.0 / LS.087.NWSH

B

#### 3 SECTION SHORT WIND-UP STAND

📏	135cm
📏	276cm
📏	155cm
📏	128cm
📏	15.5kg
📏	30kg
📏	15kg@276cm
📏	Type 14
📏	LS.104, LS.104G, LB.9000.10

Short version of LS.087.  
3 sections, 2 risers.  
Ø: 55, 45, 38mm.  
Leg Ø: 30mm.  
1 levelling leg.



# Stands **Wind Up Stands**

High and mighty wind-ups that set the industry standard.

**MAX payload 30-45kg**

## **L2.89295.0 / LS.087.NWLB**

3 SCT LOW BASE  
WIND-UP STAND

-  144cm
-  276cm
-  134cm
-  100cm
-  16kg
-  30kg
-  5.5kg@276cm
-  Type 14

Geared centrepost steel stand.  
3 sections, 2 risers.  
Ø: 55, 45, 38mm.  
1 levelling leg.  
Fitted with braked wheels.




## **L2.76981.0 / LS.6**

2 SCT WIND-UP STAND

-  139cm
-  247cm
-  153cm
-  128cm
-  16kg
-  45kg
-  30kg@247cm
-  Type 14

Chrome steel stand  
with geared column.  
Elevation: 2.2cm per handle turn.  
2 sections, 1 riser.  
Ø: 55, 45mm.  
Leg Ø: 30mm.  
1 levelling leg.  
Supplied with LS.104 braked wheels

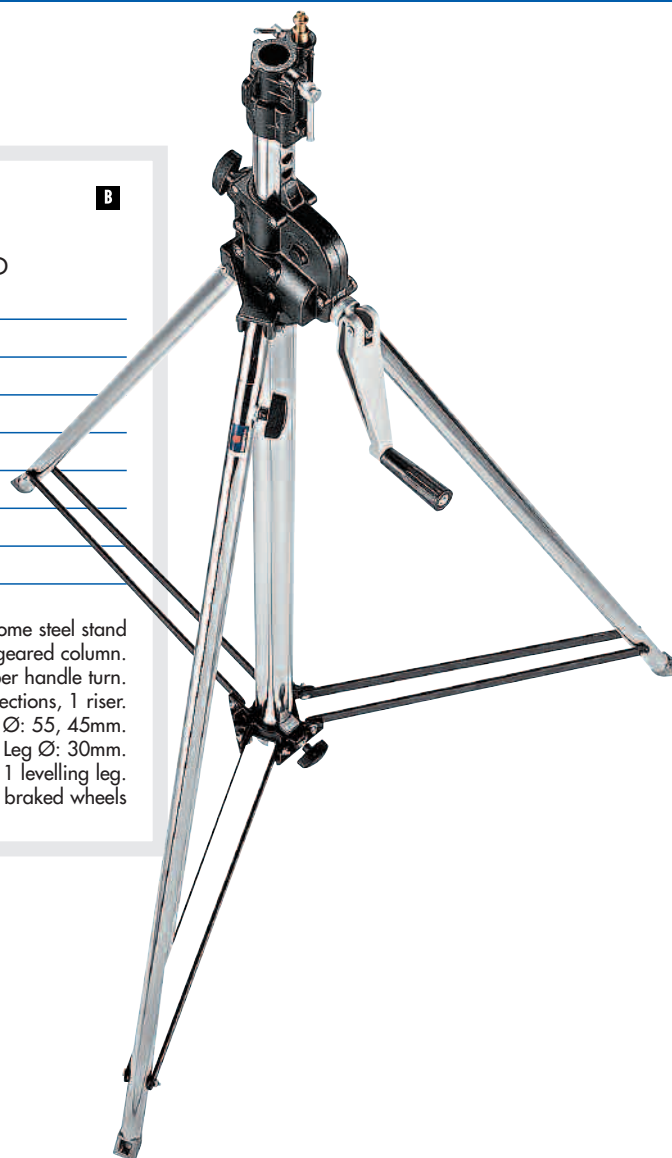



## MAX payload 80kg

### L2.88716.0 / LS.387.S

#### SUPER WIND-UP STAINLESS STEEL STAND

-  156cm
-  366cm
-  179cm
-  180cm
-  32.5kg
-  80kg
-  80kg@366cm
-  28mm
-  LS.251, LB.9000.X

Heavy lift stand with strengthened stainless steel column and legs, chrome steel risers and geared column. 3 section Ø: 70, 60, 50mm. 2 risers which extended simultaneously at 4.4cm per handle turn. Safety cable ensures simultaneous retrieval of all sections. Rapid adjustment. Leg Ø 35mm. 1 levelling leg.



### L2.88706.0 / LS.251

#### WHEELS FOR SUPER WIND UP

-  4.5kg

Ø: 125mm with brakes.  
Set of three.



### L2.88096.0 / LS.374

#### WHEELS FOR SUPER WIND UP

-  7.2kg

Ø: 160mm with brakes. Set of three.


### L2.88971.0 / LB.9000.10

not illustrated

#### WHEELS FOR WIND UP STANDS

-  7.2kg

Ø: 160mm with brakes and M10 attachment. Set of three.



# Stands **Super Crank Stands**

Super Crank Stands meet industry requirements for extra-safe operation with heavy loads.

## MAX payload 60-100kg


- Super Crank stands surpass industry requirements for extra-safe operation with heavy loads up to 100kg.
- Double safety with direct drive gear mechanism and secondary safetylock - no pulleys or cables.
- High extension versions can replace lighting or speaker towers.
- Standard version of each Super Crank stand is provided with hard braked wheels. Those stands are also available with other types of wheels and feet. To order these versions, please add the following letters to the end of the code:
  - PS: with pneumatic wheels
  - P: with semi-pneumatic wheels
  - J: with levelling jack feet
- No clutch adjustments necessary.

### L2.88083.0 / LB.1000.A

SUPER CRANK SHORT BASE  
STAND WITH BRAKED WHEELS

	153cm
	345cm
	184cm
	182cm
	41kg
	70kg
	70kg@345cm
	28mm
	GC

Aluminium legs with chrome steel base.  
Complete with braked wheels.  
3 sections, 2 risers.  
Ø: 70, 60, 50mm.  
Leg: 35 x 35mm.

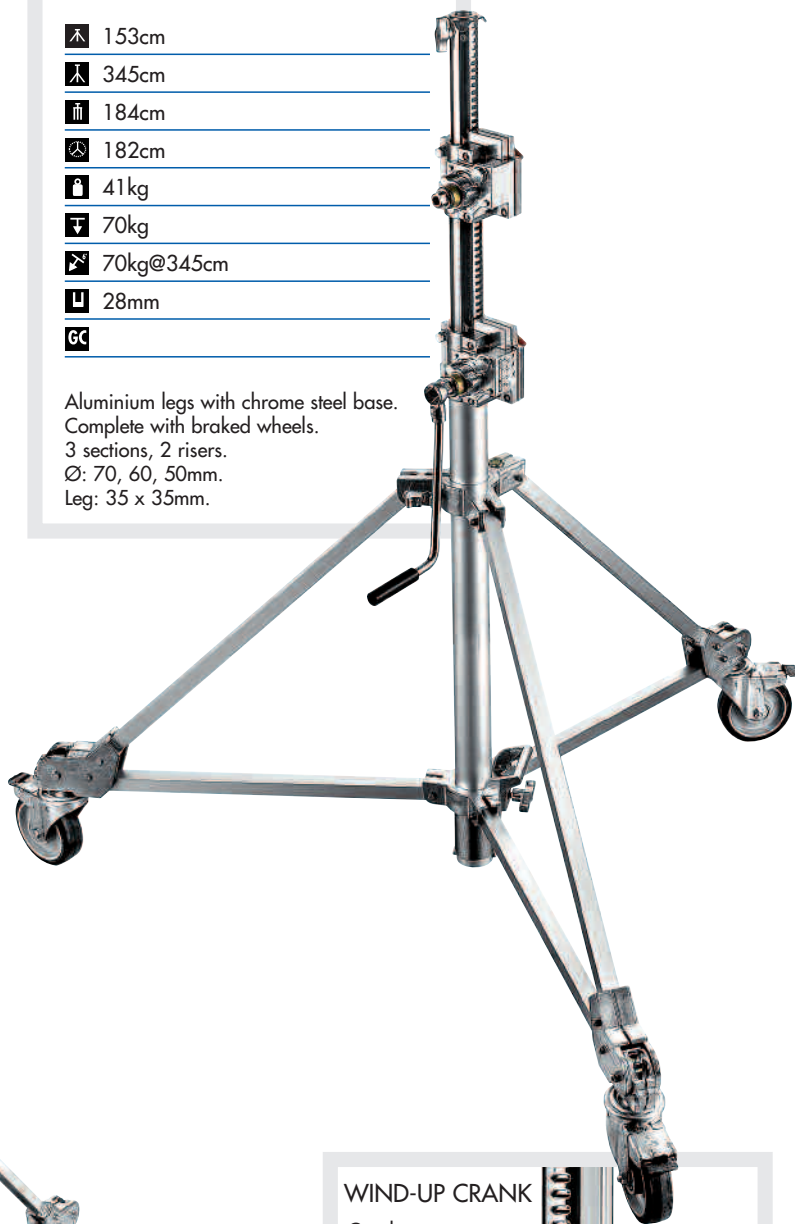


### L2.88095.0 / LB.140XL.A

4 SECTION SUPER CRANK  
(SHORT WHEEL BASE)


	155cm
	427cm
	185cm
	182cm
	60kg
	70kg
	35kg@427cm
	28mm
	GC

Chrome steel stand complete  
with braked wheels.  
4 sections, 3 risers.  
Ø: 90, 80, 70, 60mm.  
Leg: 35 x 35mm.

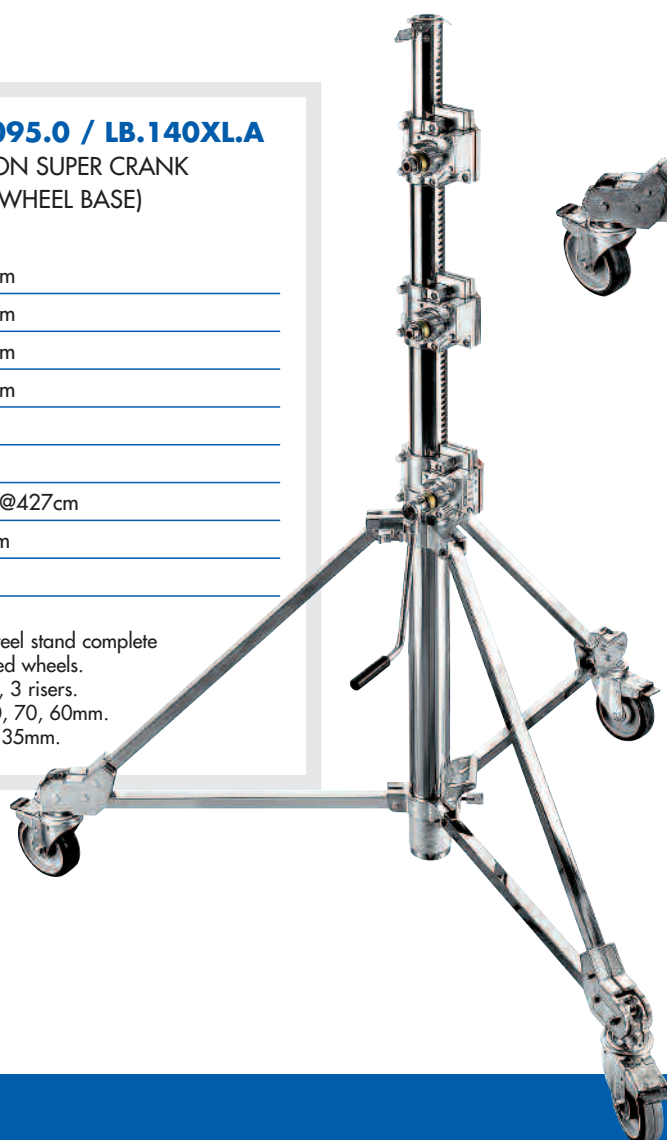


### WIND-UP CRANK

Crank-up  
gear systems

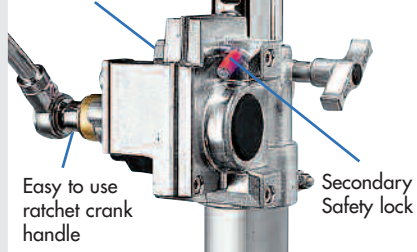

Easy to use  
ratchet crank  
handle

Secondary  
Safety lock

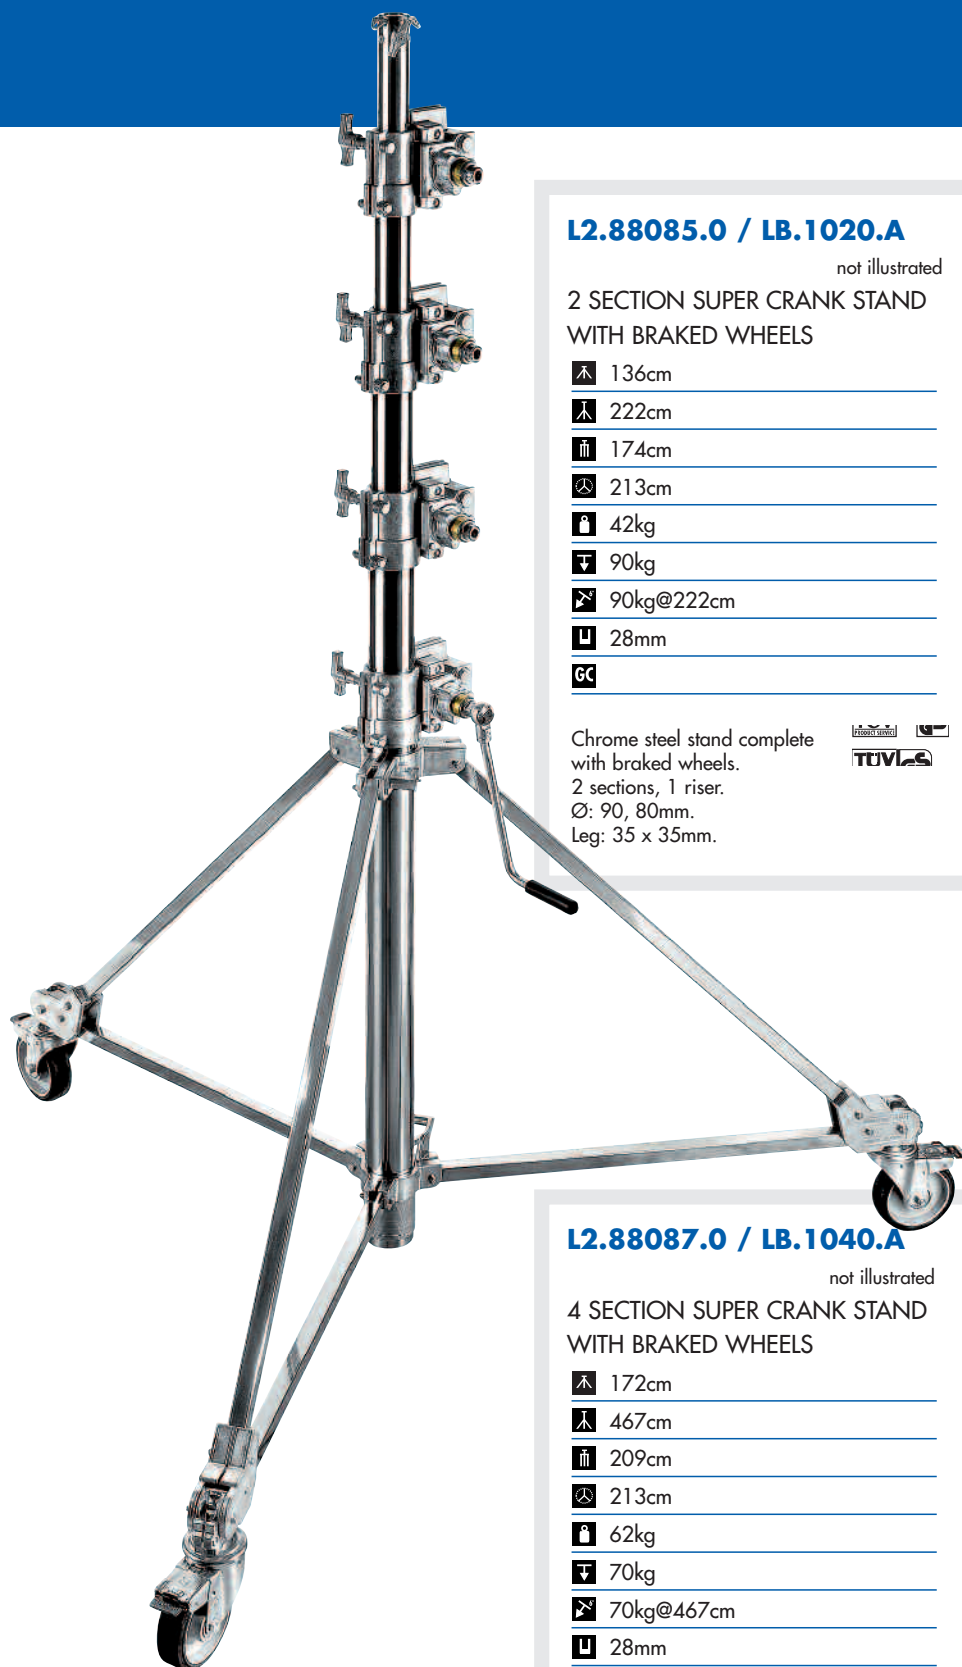

### L2.88085.0 / LB.1020.A

not illustrated

#### 2 SECTION SUPER CRANK STAND WITH BRAKED WHEELS

136cm

222cm

174cm

213cm

42kg

90kg

90kg@222cm

28mm

GC

Chrome steel stand complete  
with braked wheels.  
2 sections, 1 riser.  
Ø: 90, 80mm.  
Leg: 35 x 35mm.



### L2.88086.0 / LB.1030.A

not illustrated

#### 3 SECTION SUPER CRANK STAND WITH BRAKED WHEELS

154cm

338cm

192cm

213cm

52kg

80kg

80kg@338cm

28mm

GC

Chrome steel stand complete  
with braked wheels.  
3 sections, 2 risers.  
Ø: 90, 80, 70mm.  
Leg: 35 x 35mm.  
Includes Wind Brace Kit code LS.087WIND.



### L2.88087.0 / LB.1040.A

not illustrated

#### 4 SECTION SUPER CRANK STAND WITH BRAKED WHEELS

172cm

467cm

209cm

213cm

62kg

70kg

70kg@467cm

28mm

GC

Chrome steel stand complete  
with braked wheels.  
4 sections, 3 risers.  
Ø: 90, 80, 70, 60mm.  
Leg: 35 x 35mm.  
Includes Wind Brace Kit code LS.087WIND.



### L2.88091.0 / LB.1050.A

#### 5 SECTION SUPER CRANK STAND WITH BRAKED WHEELS

190cm

610cm

225cm

213cm

71kg

70kg

70kg@610cm

28mm

GC

Chrome steel stand complete  
with braked wheels.  
5 sections, 4 risers.  
Ø: 90, 80, 70, 60, 50mm.  
Leg: 35 x 35mm.  
Includes Wind Brace Kit code LS.087WIND.

# Stands **Super Crank Stands**

Super Crank Stands meet industry requirements for extra-safe operation with heavy loads.

## **MAX payload 100kg**

### **L2.88084.0 / LB.1005.A**

BABY SUPER CRANK STAND  
WITH BRAKED WHEELS

📏 97cm

📏 165cm

📏 122cm

📏 139cm

📏 30kg

📏 100kg

📏 90kg@165cm

📏 28mm

GC

Aluminium legs with chrome steel base.  
Complete with braked wheels.  
2 sections, 1 riser.  
Ø: 70, 60mm.  
Leg: 35 x 35mm.





## Stand Accessories

### L2.88094.0 / LB.1099.A

#### EXTENSION KIT

With the LB.1099.A kit you can convert a 2 section Super Crank stand (LB.1020.A) into a 3 section stand (LB.1030.A).

### L2.88093.0 / LB.1098.A

not illustrated

#### EXTENSION KIT


With the LB.1098.A kit you can convert a 3 section Super Crank stand (LB.1030.A) into a 4 section stand (LB.1040.A).

### L2.88092.0 / LB.1097.A

not illustrated

#### EXTENSION KIT

With the LB.1097.A kit you can convert a 4 section Super Crank stand (LB.1040.A) into a 5 section stand (LB.1050.A).

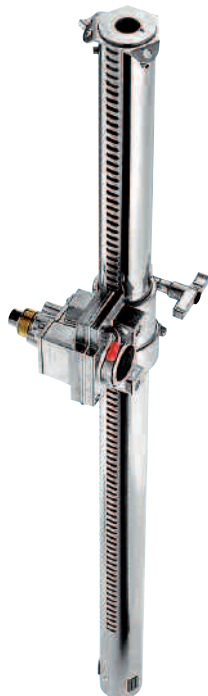

### L2.88674.0 /

### LS.087WIND

#### WIND-BRACING KIT

3-rope wind-bracing kit.  
Length: 10m.



### L2.88099.0 / LB.90000.P

#### PNEUMATIC WHEELS

Set of 3 pneumatic wheels for stands.  
Supplied with double brake mechanism that can lock wheel and pivot separately.  
Pivoting mechanism has 12 locking positions.



### L2.88098.0 / LB.90000.J

#### LEVELLING JACKS

Set of 3 levelling jacks allows you to place stands on non horizontal surfaces.



### L2.88088.0 / LB.1043.A

#### REDUCTION KIT

With the LB.1043.A kit you can convert a 5 section Super Crank stand (LB.1050.A) into a 4 section stand (LB.1040.A).



### L2.88089.0 / LB.1044.A

not illustrated

#### REDUCTION KIT

With the LB.1044.A kit you can convert a 4 section Super Crank stand (LB.1040.A) into a 3 section stand (LB.1030.A).

### L2.88090.0 / LB.1045.A

not illustrated


#### REDUCTION KIT

With the LB.1045.A kit you can convert a 3 section Super Crank stand (LB.1030.A) into a 2 section stand (LB.1020.A).

### L2.88100.0 / LBS.1080.Z

#### RATCHET HANDLE

Standard handle for all Super Crank stands.



### L2.89296.0 / LB.90005.F

#### FIXED HANDLE

Optional handle.



# Stands **Safe Crank Stand**

The Safe Stand meets industry requirements for extra-safe.

## MAX payload 90kg

- The ARRI Safe Crank, designed in the USA for lighting professionals by lighting professionals, incorporates a chain drive system for maximum safety.

No more unwanted crank kick-backs or loads that crash down unexpectedly.

The ARRI Safe Crank brings ultimate safety to every set.

- Chain drive with 20 times safety factor.
- 11 easy turns of the crank to full extension. Loads never come down until they are cranked down.
- Smart tracking wheels offer smooth and easy positioning even on uneven surfaces and when base is collapsed for transport.
- No counterweight necessary to raise/lower.

### **L2.89297.0 / LB.3000.P**

#### SAFE CRANK STAND

📏 155cm

📏 350cm

📏 186cm

📏 182cm


📏 64kg

📏 90kg

📏 70kg@350cm

📏 28mm

Chrome steel stand complete with braked wheels.  
3 sections, 2 risers.  
Ø: 90, 80, 70mm.  
Leg: 35 x 35mm.

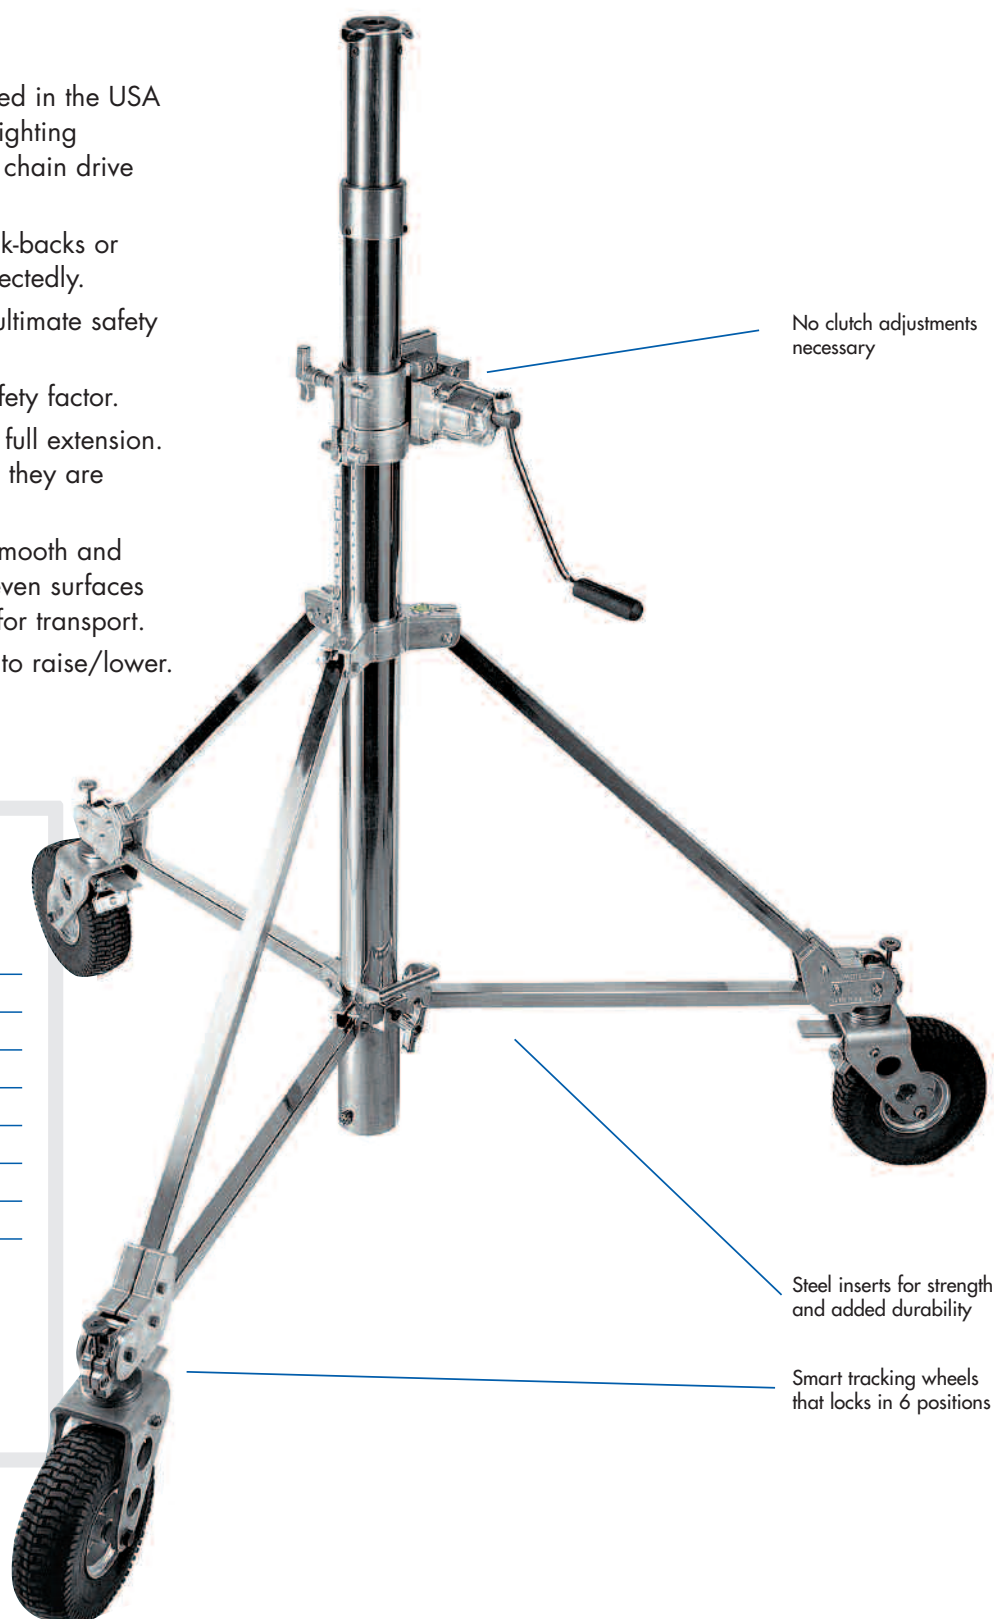


No clutch adjustments necessary

Steel inserts for strength and added durability

Smart tracking wheels that locks in 6 positions



Easy rolling transport with base closed.




Built-in wind bracing mounts.




Pull and turn tracking pin to lock the wheels in 6 positions.

New gear box mechanism to prevent reversing.

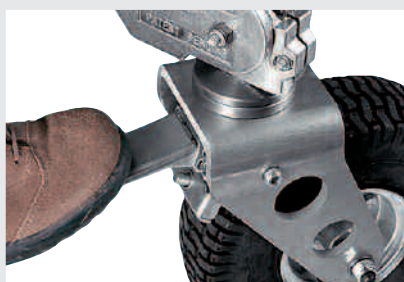

Double action brake.



Additional locking cable during transportation.


Spirit level for vertical positioning.



Secondary safety lock.



Foldable handle for transport.

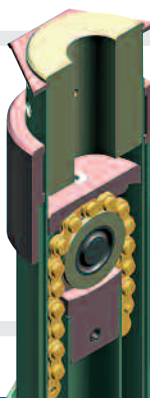

Fork lift chain drive with 20 times safety factor.

# Stands **Wincher Stand**

What else could you trust to support 180 kilos at 585cm?

## MAX payload 180kg

- All aluminium construction to reduce overall weight, transportation dimensions and avoid problems of rust.
- Independently adjustable support legs ensure vertical positioning on uneven ground.

**L2.89298.0 / LS.317-6**

WINCHER STAND

▲ 190cm

▲ 585cm

■ 190cm

■ 220cm

■ 58kg

■ 180kg

■ 180kg@585cm

■ 28mm



The first 4-stage, telescopic and compact lifter made entirely in aluminium. Not only is there a weight reduction but also a saving in the overall dimensions for transportation whilst maintaining all the performance features of steel models.

The purpose designed aluminium column extensions run smoothly on Teflon coated guides.


The winch mechanism is designed for loads up to 500kg and lifts the first column by means of a polyester belt providing a smooth and uniform performance; the additional columns are each lifted by two steel wire ropes.

The support legs can be independently adjusted to ensure the Wincher is vertical even on irregular surfaces. Two wheels assist transportation.

The Wincher series is designed to lift lighting fixtures, speakers, aluminium trusses etc. safely.

## Key Features

- 1 28mm Spigot Slot + Joining Holes for Extra Support
- 2 Teflon Coated Sliding Guides
- 3 Triple-Steel Wire Ropes
- 4 Transportation Handle
- 5 Polyester Belt
- 6 Professional Winch
- 7 Belt Protection Carter
- 8 Slots for Safety Pin
- 9 Column & Legs Coated in Scratch-Resistant Paint
- 10 Protective Bellows
- 11 Adjustable Stabilizers
- 12 Collapsible Legs
- 13 Rubber-Coated Shock-Absorbing Base Supports

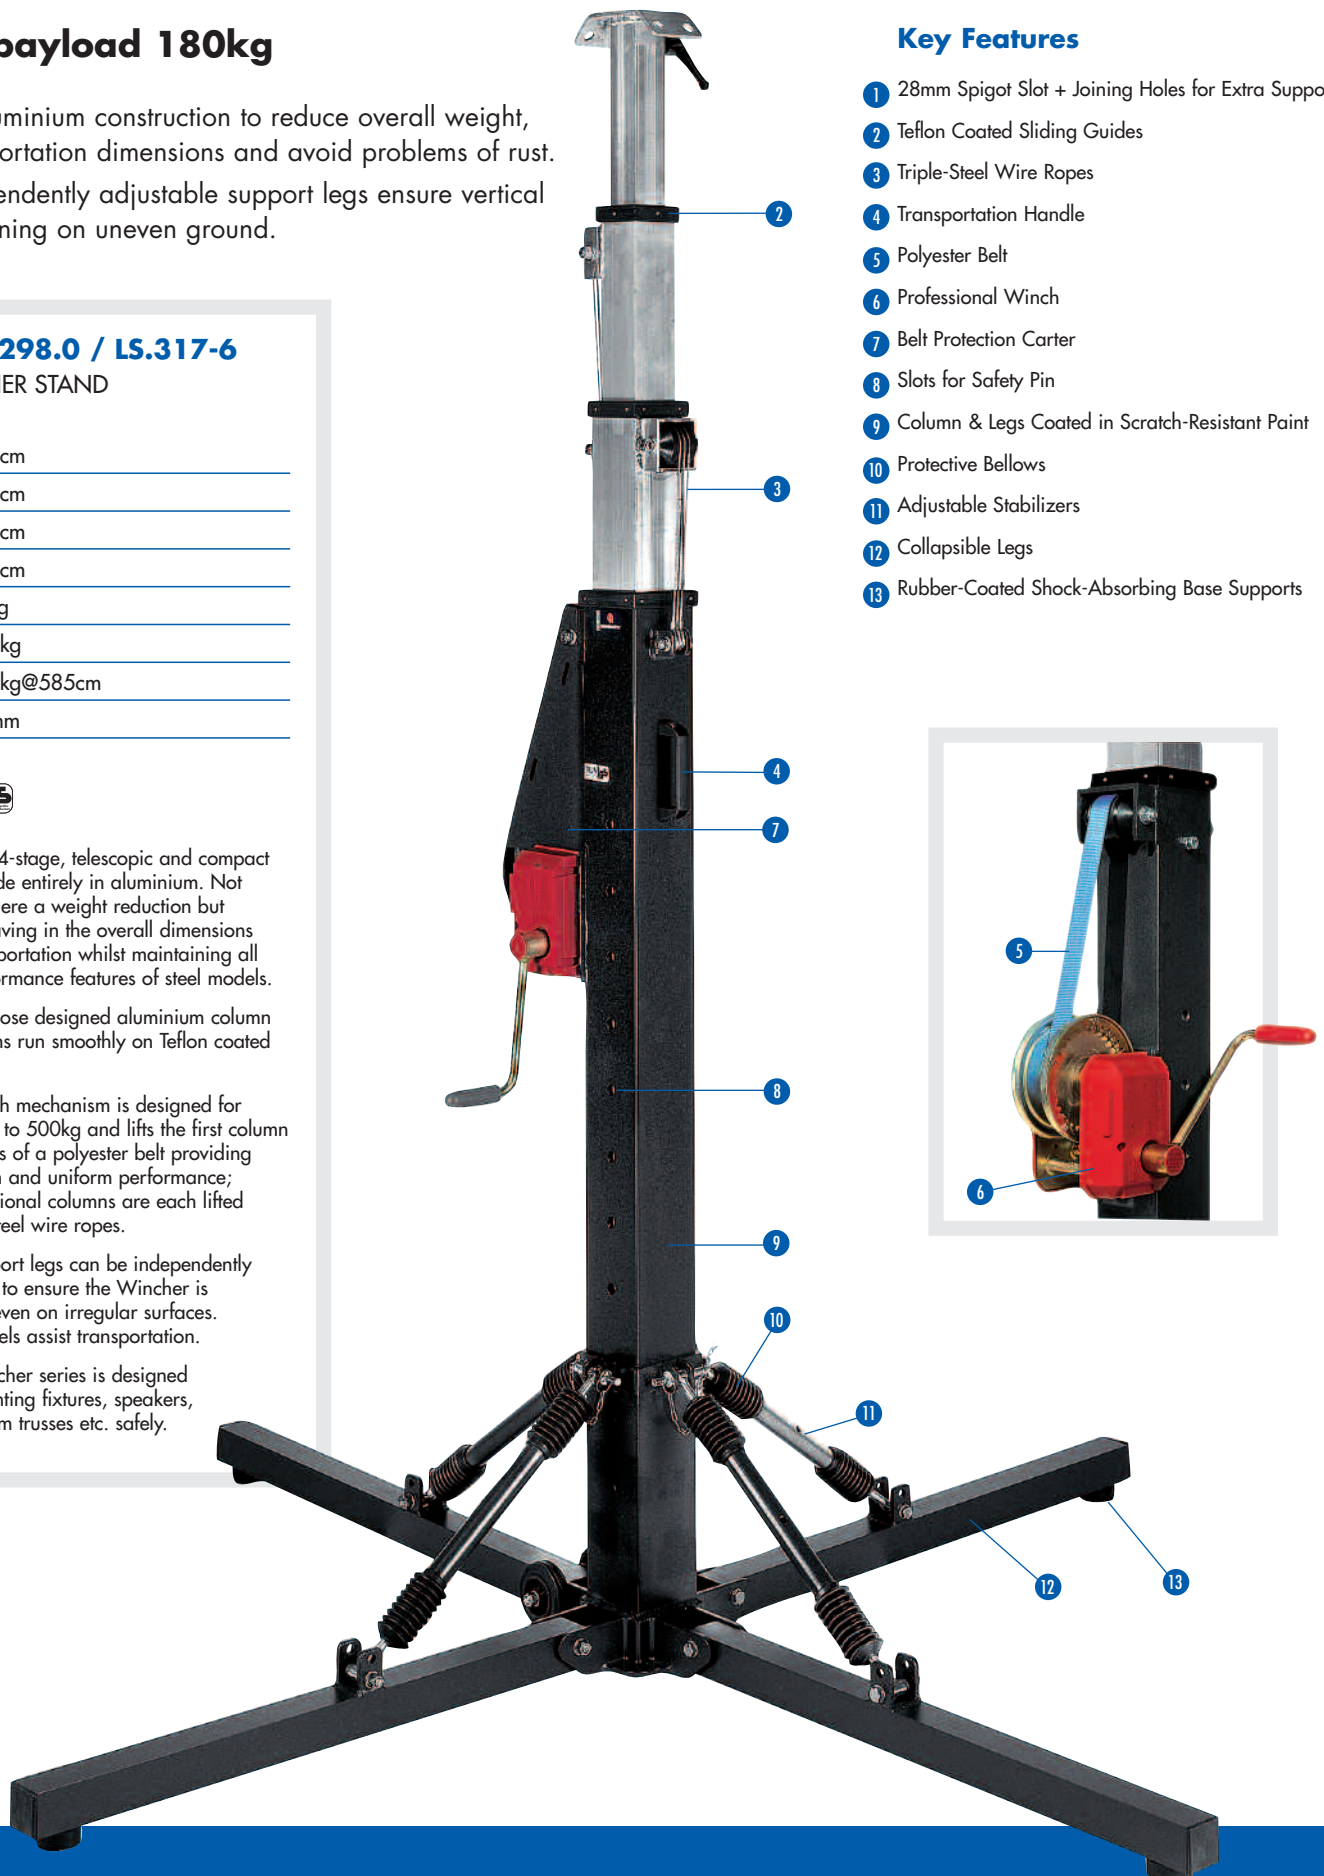



## Accessories - Wheels for Stands

- Our range of stand accessories offers some indispensable items and broadens the range of application of your existing stands. From wheels for moving the stand rapidly from position to position on set, to stand height extensions for when that extra reach is crucial...

### L2.89300.0 / LS.017

#### CASTER WHEEL SET


 0.45kg

Caster wheel set for stands with legs Ø: 19mm. Set of three.



### L2.88640.0 / LS.018

#### CASTER WHEEL SET


 0.54kg

Caster wheel for stands with legs Ø: 22mm. Set of three.



### L2.88992.0 / LS.104

#### WHEEL SET


 1.5kg

Ø: 75mm with brakes and M10 attachment. Set of three.




### L2.88679.0 / LS.110

#### WHEEL SET


 1.7kg

Ø: 75mm with brakes and adapter for legs Ø: 22mm. Set of three.



### L2.89301.0 / LS.109

#### WHEEL SET

 1.43kg

Ø: 80mm without brakes and adapter for legs Ø: 22mm. Set of three.



### L2.89299.0 / LS.103

#### WHEEL SET

 1.24kg

Ø: 80mm without brakes, with M10 attachment. Set of three.



### L2.76999.0 / LS.104G

#### WHEEL SET

 3kg

Ø: 100mm with brakes and M10 attachment. Set of three.



### L2.88082.0 / LS.110G

#### WHEEL SET

 3.2kg

Ø: 100mm with brakes and adapter for legs Ø: 22mm. Set of three.



### L2.88706.0 / LS.251

#### WHEELS FOR SUPER WIND UP

 4.5kg

Ø: 125mm with brakes. Set of three.



### L2.76980.0 / LA.90000.A


#### BRAKED WHEEL

 3.3kg

Ø: 125mm for 25 x 25mm square legs. Set of three.

### L2.88081.0 / LA.90000.B

not illustrated  
BRAKED WHEEL BLACK



### L2.88096.0 / LS.374

#### WHEELS FOR SUPER WIND UP

 7.2kg

Ø: 160mm with brakes. Set of three.

### L2.88971.0 / LB.9000.10

#### WHEELS FOR WIND-UP STANDS

 7.2kg

not illustrated

Ø: 160mm with brakes and M10 attachment. Set of three.






# Stands Extensions

Improve your stands' performance!

## L2.88974.0 / LC.6022.A

### SMALL STEEL STAND EXTENSION

 1.59kg

 Top type 34


 Bottom type 35

Chrome length plated  
steel extension.  
Length: 28cm.



## L2.89272.0 / LC.590


### CONKA BONKA SET

 1.09, 1.25, 1.75kg

 Top type 27

 Bottom type 35

Set of three chrome plated  
steel Cine Extensions.  
150mm, 270mm and 675mm

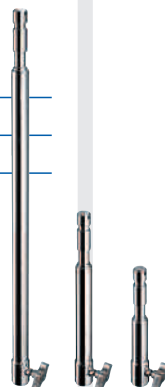

## L2.88975.0 / LC.6024.A

### MEDIUM STEEL STAND EXTENSION

 1.72kg

 Top type 34

 Bottom type 35

Chrome length plated  
steel extension.  
Length: 39cm.



## L2.89302.0 / LS.122B

### POLE FOR BACKLITE STAND

 0.32kg

 Top type 18

 Bottom type 19

2 section (Ø 22, 19mm)  
black aluminium pole.  
Minimum height: 48cm.  
Maximum height: 80cm.



## L2.89304.0 / LS.142ACS

### FIXED STEEL STAND EXTENSION

 2.1kg

 Top type 14


 Bottom type 37

1 section (Ø 35mm)  
chrome steel extension.  
Length: 104cm.



## L2.88976.0 / LC.6026.A

### LONG STEEL STAND EXTENSION

 1.89kg

 Top type 34


 Bottom type 35

Chrome length plated  
steel extension.  
Length: 52cm.



## L2.89303.0 / LS.099B

### BABY STAND EXTENSION

 0.60kg

 Top type 19

 Bottom type 1


3 section (Ø 25, 22, 19mm)  
black aluminium extension.  
Minimum height: 88cm.  
Maximum height: 235cm.




## L2.89305.0 / LS.142ABS

### FIXED BLACK ALU STAND EXTENSION

 2.1kg

 Top type 14

 Bottom type 37


1 section (Ø 35mm)  
black aluminium extension.  
Length: 104cm.



### **L2.89306.0 / LS.142SH**

#### **SHORT STAND EXTENSION**

 3kg

 Top type 14

 Bottom type 37


2 sections (Ø 35, 30mm)  
chrome steel extension.  
Minimum height: 75cm.  
Maximum height: 110cm.



### **L2.88686.0 / LS.142**


#### **STAND EXTENSION**

 3.6kg

 Top type 14

 Bottom type 37


2 sections (Ø 35, 30mm)  
chrome steel extension.  
Minimum height: 125cm.  
Maximum height: 210cm.



### **L2.88689.0 / LS.146**

#### **HIGH STAND EXTENSION**

 4.8kg

 Top type 14

 Bottom type 37

3 sections (Ø 35, 30, 25mm)  
chrome steel extension.  
Minimum height: 137cm.  
Maximum height: 314cm.



### **L2.89307.0 / LS.142SHB**

#### **BLACK ALU SHORT EXTENSION**

 2kg

 Top type 14


 Bottom type 37


2 sections (Ø 35, 30mm)  
black aluminium extension.  
Minimum height: 75cm.  
Maximum height: 110cm.




### **L2.89308.0 / LS.142B**

#### **BLACK ALU STAND EXTENSION**

 2.4kg

 Top type 14

 Bottom type 37

2 sections (Ø 35, 30mm)  
black aluminium extension.  
Minimum height: 125cm.  
Maximum height: 210cm.




### **L2.89309.0 / LS.146B**

#### **BLACK ALU HIGH STAND EXTENSION**

 2.8kg

 Top type 14

 Bottom type 37

3 sections (Ø 35, 30, 25mm)  
black aluminium extension.  
Minimum height: 137cm.  
Maximum height: 314cm.



# Stands **General Accessories**

Improve your stands' performance!

## **L2.88649.0 / LS.027**

### STAND HOLDER

 2.8kg

Holder for 8 light stands.  
Width: 115cm.  
Distance between fixing holes: 64.4cm.  
Depth: 19cm.



## **L2.88673.0 / LS.087PA**

### PEG ADAPTER SET

 0.6kg

To be used where, for safety reasons,  
the stand must be secured to the floor.  
Compatible with stand models  
LS.7, LS.6, LS.087, LS.269U and LS.270U.  
Set of three.




## **L2.88674.0 / LS.087WIND**

### WIND-BRACING KIT

 1kg

Wind bracing kit of 3 ropes for all stands  
with attachment type 14 and Super Wind-Up series.  
Length: 10m.  
Not supplied with the stand.

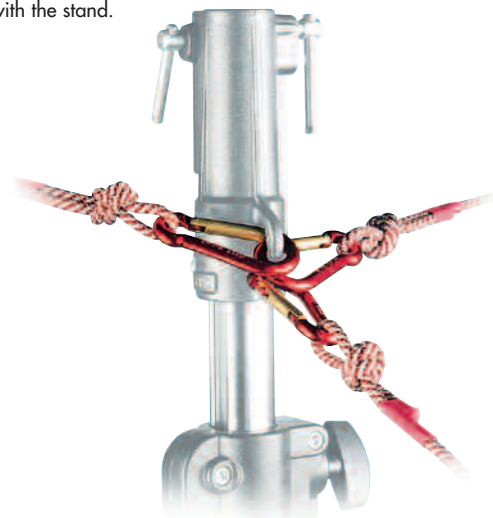

### **L2.75160.0 / LS.428-7.5**

OPERATING POLE (LONG)

 1.60kg

Minimum extension: 230cm.  
Maximum extension: 750cm.  
Closed length: 210cm.



### **L2.80746.0 / LS.428-4.0**

OPERATING POLE (MEDIUM)


 1.05kg

Minimum extension: 140cm.  
Maximum extension: 400cm.  
Closed length: 120cm.



### **L2.80745.0 / LS.428-2.5**

OPERATING POLE (SHORT)

 0.90kg

Minimum extension: 100cm.  
Maximum extension: 250cm.  
Closed length: 80cm.



### **L2.88020.0 / L9.STAND/BAG**

BLACK STAND BAG

Ideal for carrying baby stands or filter rolls. Length: 130cm (51")



### **L2.88003.0 / L9.2000.0**

SMALL SAND BAG

 7kg

(Sand not supplied).



### **L2.88006.0 / L9.4000.0**

LARGE SAND BAG

 16kg

(Sand not supplied).



### **L2.89310.0 / LS.BAG.3**

LARGE STAND BAG

(20dia x 120cm)

This range of bags, made in nylon cordura, aims to be a useful tool for all professional photographers working on location. All bags are provided with a carrying handle system made of nylon straps that go all the way around the bag to avoid undesired breaks and to ensure the maximum safety during transportation of heavy equipment. Supplied with two steel spring catches to fix the shoulder strap code LS.502 available as an optional.

### **L2.88722.0 / LS.502**

ADJUSTABLE LENGTH BAG STRAP

Shoulder strap to fit stand bags.

**ARNOLD & RICHTER CINE TECHNIK**

Lichttechnik, Pulvermühle,  
83071 Stephanskirchen  
Tel +49 80 36 30 09 84  
Fax +49 80 36 30 09 79

**ARRI LIGHTING SOLUTIONS GMBH**

Ernst-Augustin-Str. 12, Gebäude R1  
D-12489 BERLIN  
Tel +49 (0) 30 678-233-0  
Fax +49 (0) 30 678-233-99

**ARRI ITALIA S.r.l.,**

Viale Edison 318,  
20099 Sesto S. Giovanni, Milano  
Tel +39 02-26 22 71 75  
Fax +39 02-242 16 92

**ARRI INC. NEW YORK OFFICE**

617 Route 303  
Blauvelt, NY 10913-1109  
Tel +1 845-353-14 00  
Fax +1 845-425-12 50

**ARRI CANADA Ltd.,**

415 Horner Avenue, Unit 11,  
Etobicoke, Ontario, M8W 4W3,  
Tel +1 416-255 33 35  
Fax +1 416-255 33 99

Distribution by:

**ARRI (GB) Limited**

2 Highbridge, Oxford Road, Uxbridge, Middlesex UB8 1LX

**Tel:** +44 (0)1895 457000 **Fax:** +44 (0)1895 457001

**Email:** sales@arri-gb.com **Web:** www.arri.com

2/2006  
9.2001.1