




Clamps

ARRI's extensive range of clamps is a perfect complement to the lighting stands. The high quality of construction leads to maximum durability and reliability in any application.

Ongoing improvements keep products in line with the demands of the film, video and theatre industries. The time-saving quick action system is available on four of the most popular clamps including the industry standard Superclamp. Grab clamps support loads up to 150kg on almost any pipe, bar or I beam. The widely-used barrel clamp now gives greater ease of use and a wider range. For the Film, TV and Theatre industries ARRI offers a clamp to meet all your requirements.

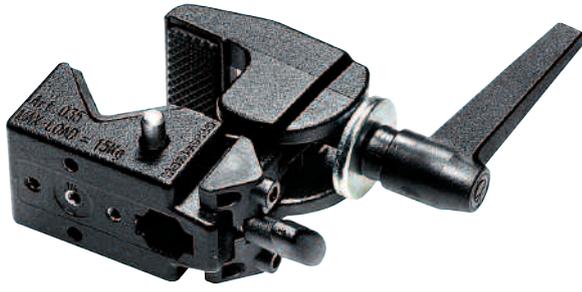

Telescopic Hanger Clamps	2.2
Spring Clamps	2.3
Pipe Clamps	2.4
Stage Clamps	2.7
Super Clamps	2.8
Super Clamp Accessories	2.9
Quick Action Clamps	2.11
Grab Clamps	2.12
LP Eye Coupler Clamps	2.13
MP Eye Coupler Clamps	2.16
MP Slim Eye Coupler Clamps	2.17

Clamps Telescopic Hanger Clamps

Accept no limits to luminaire suspension & positioning.

- A convenient method of suspending luminaires from above for unobstructed floor areas.
- ARRI telescopic hangers are renowned for their strength and versatility. Available with either a stirrup or universal head, all hangers come with a safety pin to prevent the riser from slipping.

L2.88166.0 / LC.8025.A

TELESCOPIC HANGER WITH UNIVERSAL HEAD

📏 121cm	📊 5.1kg
📏 201cm	📊 Type 34

Max Load with 16mm spigot 10kg.
Max Load with 28mm socket 40kg.

L2.88167.0 / LC.8027.A

not illustrated

LONG TELESCOPIC HANGER WITH UNIVERSAL HEAD

📏 212cm	📊 6.8kg
📏 381cm	📊 Type 34

Max Load with 16mm spigot 10kg.
Max Load with 28mm socket 40kg.

Safety Pin

L2.88164.0 / LC.8020.A

TELESCOPIC HANGER WITH STIRRUP

📏 117cm	📊 5.4kg
📏 197cm	📊 40kg

Luminaire attachment - Stirrup Ø 40mm.

L2.88165.0 / LC.8022.A

not illustrated

LONG TELESCOPIC HANGER WITH STIRRUP

📏 210cm	📊 6.8kg
📏 379cm	📊 40kg

Luminaire attachment - Stirrup Ø 40mm.

Safety Pin

L2.88169.0 / LC.8088.UH

SHORT TELESCOPIC HANGER WITH UNIVERSAL HEAD

📏 76cm	📊 4.6kg
📏 161cm	📊 Type 34

Max Load with 16mm spigot 10kg.
Max Load with 28mm socket 40kg.

L2.88168.0 / LC.8088.ST

TELESCOPIC HANGER WITH STIRRUP

📏 73cm
📏 157cm
📊 4.7kg
📊 40kg

Luminaire attachment - Stirrup Ø 40mm.

- Wide choice of spring clamps and grips covers a huge range of applications.
- Constructed of aluminium or sheet steel, the clamps have thousands of uses, from supporting lights to clamping backgrounds to crossbars.


L2.89311.0 / LS.275

MINI SPRING CLAMP

- 0.11kg
- Type 1
- Type 17



Clamps onto bars up to Ø 35mm. It can be mounted also on 16mm extension arms.




L2.88695.0 / LS.175

SPRING CLAMP

- 0.32kg
- Type 1
- Type 17




Clamps onto bars up to Ø 40mm.





L2.88160.0 / LC.5000.A

PELICAN CLAMP (ITALIAN)

- 1.4kg
- Type 2
- Type 33
- GC

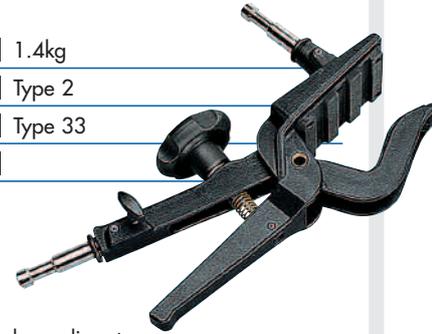


Works on diameters from 15mm to 80mm.

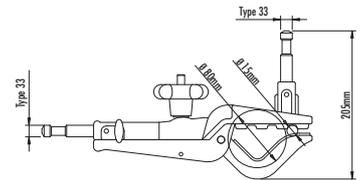

L2.76988.0 / LS.043R

GAFFER GRIP

- 0.8kg
- Type 22
- Type 22




Gaffer grip with adjustable jaws. Grip from: 25mm to 65mm.


L2.88657.0 / LS.043.AR

GAFFER GRIP

- 0.65kg
- Type 1 + Spigot LS.013
- Type 22



Gaffer grip with adjustable jaws. Grip from: 25mm to 65mm.




L2.88715.0 / LS.375

MULTICLIP

- 0.08kg



This versatile double clip can be used to hold gels in front of lights or small reflecting panels.



Clamps Pipe Clamps


Sturdy and practical - ideal for all heavy duty applications.

- ARRI Pipe Clamps are made from in aluminium alloy or rugged gravity cast aluminium for extra strength.
- Clamping range encompasses pipes from 2mm to 78mm diameter.
- All standard luminaire attachments available, from 16/28mm bushing to 16mm pins and 1/4" - 3/8" - M10 and M12 male thread.

L2.76989.0 / LS.137


SWIVELLING "C" CLAMP

- 1.6kg
- ▼ 10/75kg*
- 28mm
- 16mm
- GC

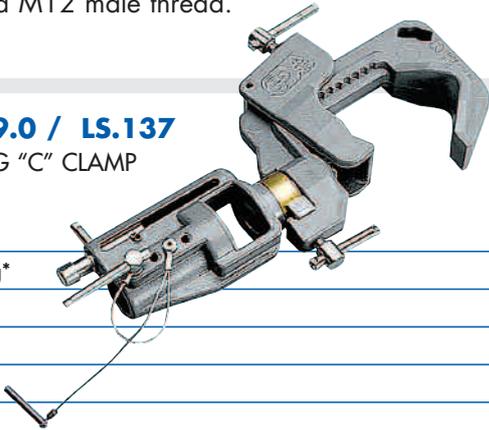

Works on diameters from 28mm to 78mm.

* 10kg on 16mm attachment, 75kg on 28mm attachment

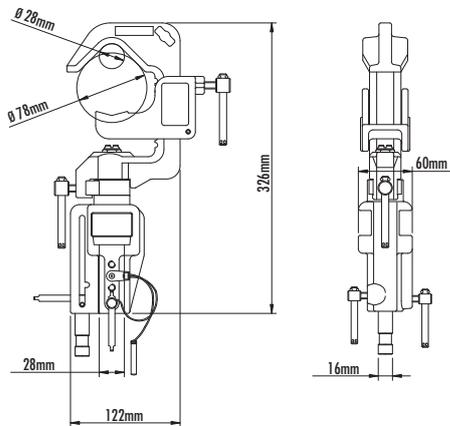


L2.88694.0 / LS.171

MINI CLAMP

- 0.16kg
- 16mm

Clamps on bars up to \varnothing : 35mm.




L2.88698.0 / LS.196AC

MICRO CLAMP

- 0.06kg

Grips items from 2mm to 16mm thick.



L2.76990.0 / LS.137CB

SAFETY CABLE FOR "C" CLAMP 4mm x 1m

L2.89312.0 / LC.155-01

SAFETY CABLE 3.5mm x 0.7m

L2.89313.0 / LC.155-02

SAFETY CABLE 5mm x 0.7m

L2.89314.0 / LC.155-03

SAFETY CABLE 6mm x 1m



L2.88110.0 / LC.2100.A

HEAVY DUTY BABY PIPE CLAMP WITH 16mm SPIGOT


0.62kg

100kg

Type 33

GC

Works on diameters from 10mm to 55mm.

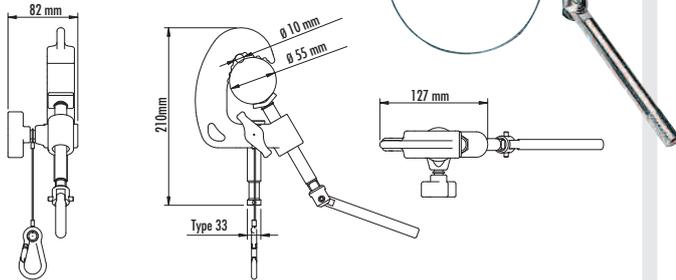

L2.88101.0 / LC.1000.A

JUNIOR PIPE CLAMP WITH 28mm SOCKET


1.13kg

250kg

28mm

GC

Works on diameters from 20mm to 55mm.

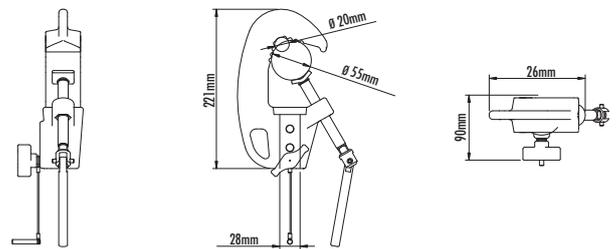


L2.88163.0 / LC.7020.A

SQUARE CLAMP WITH 16mm SPIGOT

0.24kg

Type 33

Fits square pipe 35mm x 35mm.

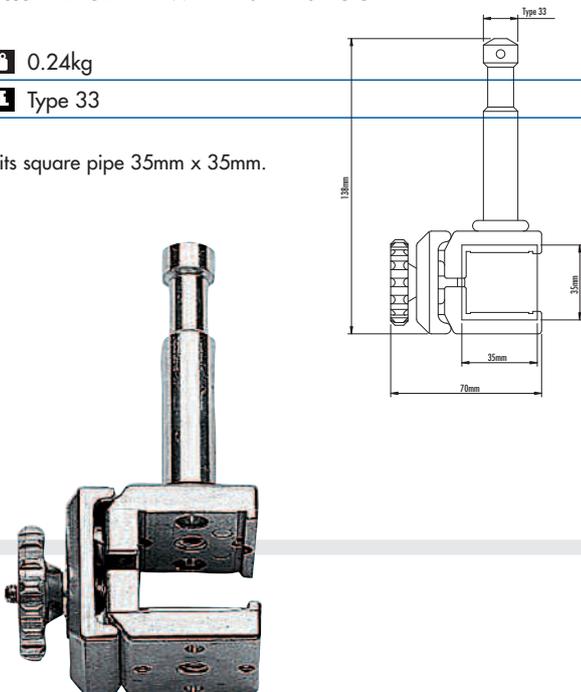


L2.88162.0 / LC.7000.A

SQUARE CLAMP WITH 16mm SPIGOT

0.30kg

Type 1

Fits square pipe 35mm x 35mm.

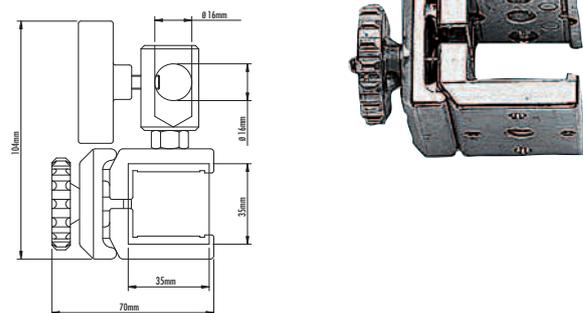

Clamps Pipe Clamps

Sturdy and practical - ideal for all heavy duty applications.

L2.88118.0 / LC.3050.NK

BARREL CLAMP

-  1kg
-  100/300kg*
-  17mm/28mm
-  GC

Works on diameters from 42mm to 52mm.

* 100kg on 16mm attachment.
300kg on 28mm attachment.





L2.88113.0 / LC.3000.A

GRID CLAMP

-  1.1kg
-  50/30kg*
-  35mm
-  GC

Works on diameters from 25mm to 55mm.

* 50kg on vertical position.
30kg on horizontal position.

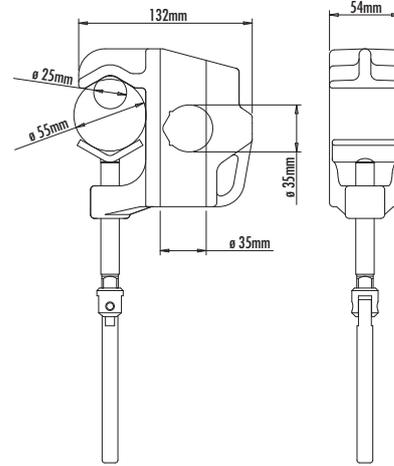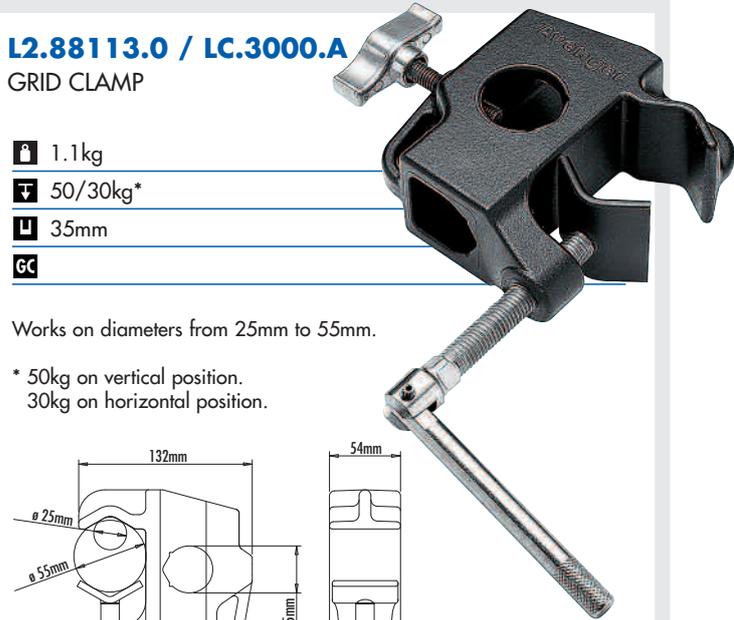


L2.89315.0 / LC.3056.A

SLIM HOOK CLAMP


-  0.8kg
-  500kg
-  M10 x 25



The slim version of the Lock Clamp lets you to clamp in the narrowest of spaces.
Clamps perfectly on pipes from 50mm to 52mm.

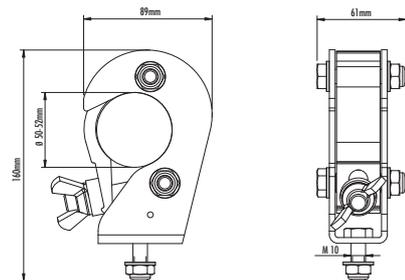

- Work on diameters from 30mm to 52mm.
- The double locking knob position always provides an optimal grip point.

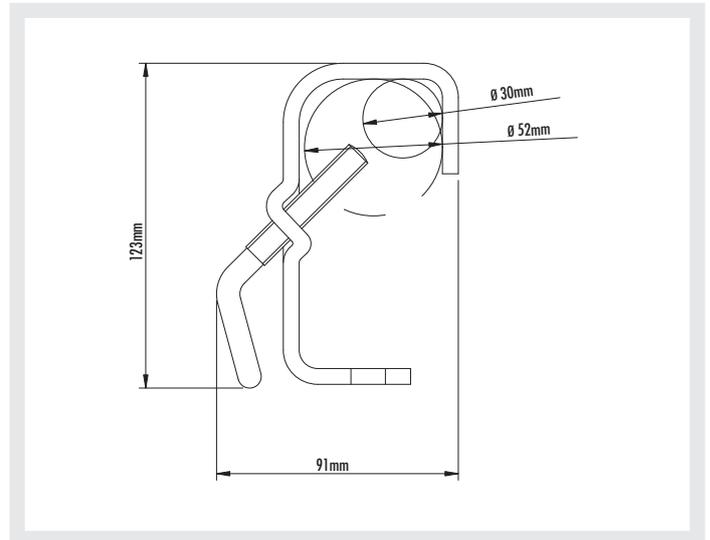

L2.88106.0 / LC.2080.A

STAGE CLAMP WITH 13mm HOLE

- 📦 0.37kg
- ⚖️ 50kg
- 👤 13mm hole

For multipurpose applications.



L2.88107.0 / LC.2085.A

STAGE CLAMP WITH 16mm SPIGOT

- 📦 0.47kg
- ⚖️ 50kg
- 👤 Type 33

Supplied with 16mm stud.



L2.88108.0 / LC.2090.A

STAGE CLAMP WITH 28mm SPIGOT

- 📦 0.9kg
- ⚖️ 50kg
- 👤 Type 35

Supplied with 28mm stud.




L2.88109.0 / LC.2095.A

STAGE CLAMP WITH 28mm SOCKET

- 📦 0.75kg
- ⚖️ 50kg
- 👤 28mm

Supplied with 28mm socket.

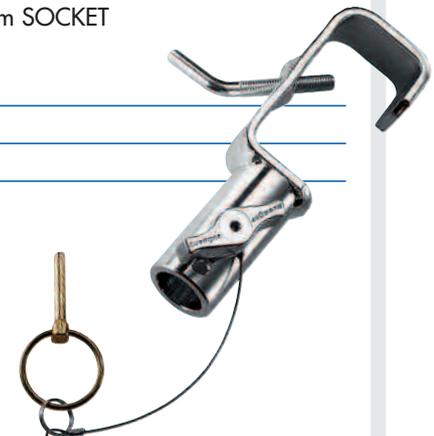




Clamps Super Clamps

Making something great even better.

- Quite simply the most versatile single piece of light grip gear ever. You name it and Super Clamp grips it, you imagine where you want it and Super Clamp holds it there.
- Friction-lined screw-operated jaws grip everything from 13mm to 55mm.
- Hexagonal socket with unique secondary safety lock system holds items in place even if the screw lock comes undone.
- Supplied with a wedge to square off the jaws for mounting to flat surfaces. This masterpiece of practicality and solidity is the most widely copied clamp in the world!
- Available in aluminium alloy or heavy duty gravity casting for extra strength.
- Attachment: 16mm hexagonal socket with 1/4" thread holds most lighting fixtures without an adapter.

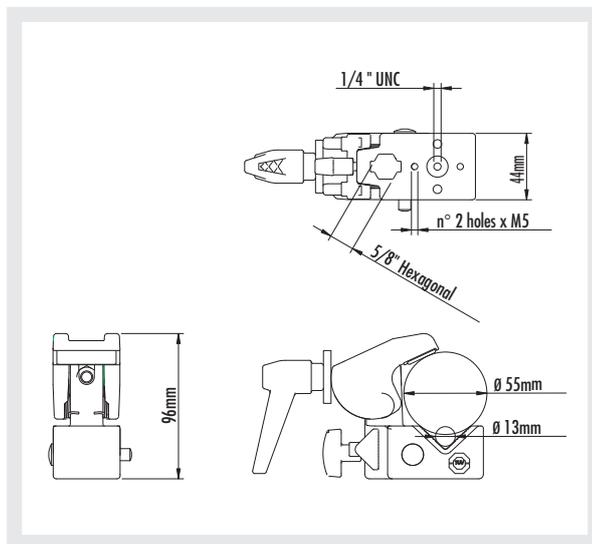


L2.76985.0 / LS.035

SUPER CLAMP

0,41kg

15kg

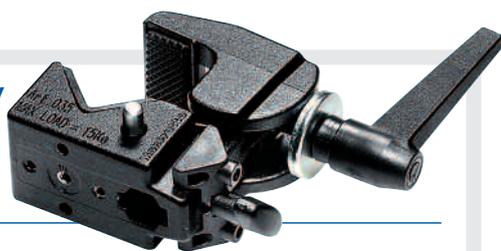

Ideal clamp for photographic application. Ergonomic lever to securely lock clamping position.



L2.89316.0 / LS.035X

STAINLESS SUPER CLAMP

not illustrated

Identical to the LS.035 with a weather resistant solution, provided with a stainless steel threaded shaft locking screw.

L2.88652.0 / LS.035WDG

SPARE WEDGES

not illustrated

L2.88726.0 / LS.635

QUICK ACTION SUPER CLAMP

0.47kg

15kg


The rapid action locking jaw has also been applied to the most well known clamp in the world, the original Super Clamp. These modifications allow us to keep its extreme versatility adding unrivaled speed in locking and unlocking. Supplied with wedge to allow the clamp to fit on flat surface.



L2.88104.0 / LC.10550.A

HEAVY DUTY SUPER CLAMP

0.45kg

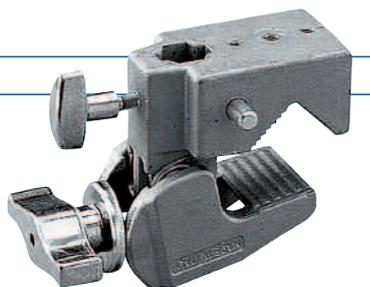


Extra strong version of Super Clamp because of a special manufacturing process named gravity casting, allowing heavier manipulation.

L2.76987.0 / LS.038

DOUBLE SUPER CLAMP

0.83kg

Set of two Super Clamps fastened together at fixed right angle to provide extra strength support for tubes or bars.

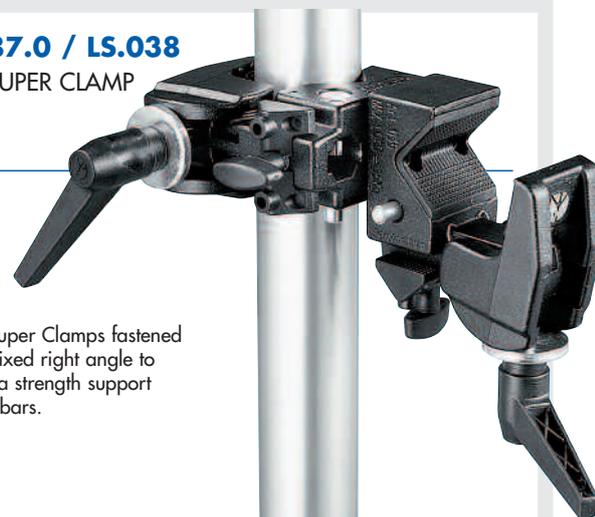

L2.89302.0 / LS.122B

POLE FOR BACKLITE STAND

 0.32kg

 Top type 18

 Bottom type 19

Extendable arm with double male spigot.
Min. height 48cm, max. height 80cm.



L2.88697.0 / LS.196AB.2

MINI ARTICULATED ARM


 0.4kg

 Type 17

 Type 17

 1.5kg

Swivelling arm; each section is separately locked.
Length: 60cm.



L2.88999.0 / LS.196B.2

not illustrated

MINI ARTICULATED ARM WITH CAMERA BRACKET

Same as LS.196 with Camera/Umbrella Bracket LS.143BKT.

L2.76982.0 / LS.143N

MAGIC ARM WITHOUT ACCESSORIES

 1.07kg

 Type 17

 Type 17

 3kg

Articulated arm with centre lever to lock all 3 movements.
Length: 53cm.



L2.88996.0 / LS.143A

MAGIC ARM WITH CAMERA BRACKET

Same as LS.143N with Camera/Umbrella Bracket LS.143.BKT.

L2.88687.0 / LS.143R

MAGIC ARM WITH SUPER CLAMP

Same as LS.143N with LS.035 Super Clamp.

L2.89000.0 / LS.244N

VARIABLE FRICTION ARM

 1.09kg

 Type 17

 Type 17

 3kg

Features as LS.143N, but a large locking knob takes the place of the cam-lever. Variable friction and locking of arm obtained by adjusting knob.



L2.88705.0 / LS.244

not illustrated

VARIABLE FRICTION ARM WITH CAMERA BRACKET

Same as LS.244N with Camera/Umbrella Bracket LS.143BKT only.

L2.88701.0 / LS.237

FLEX ARM

 0.3kg

 16mm

 Type 18

Flexible arm, Ø 12mm, 55cm long with hexagon stud to fit Super Clamp LS.035 with 3/8" female thread and 16mm stud with 1/4" male thread type 18.



L2.88702.0 / LS.237HD

FLEX ARM HEAVY DUTY

 0.3kg

 Type 18

 16mm

Same as LS.237, but Ø 18mm.



L2.88690.0 / LS.155

TILT-TOP HEAD

 0.5kg

 16mm + Camera Bracket Art. LS.143BKT

 16mm

Twin swivelling 16mm spigots and single lever lock.
Supplied with: Camera/Umbrella Bracket LS.143BKT. Height: 14.5cm.



L2.89318.0 / LS.155BKL

not illustrated

TILT-TOP HEAD

 0.4kg

 16mm

 16mm

Tilt-top head alone, available separately without Camera/Umbrella Bracket LS.143BKT.

Clamps Super Clamp Accessories

Making something great even better.

L2.76991.0 / LS.013

ADAPTER SPIGOT

 0.07kg

Universal 16mm spigot with double male thread 1/4" and 3/8".



L2.88680.0 / LS.118

SHORT 16mm SPIGOT WITH 1/4" + 3/8" SCREW

 0.04kg

Universal short 16mm spigot with double male thread 1/4" and 3/8".



L2.89321.0 / LS.036-14

LIGHTING STUD 1/4"

 0.07kg

Same as LS.036-38 with 1/4" male threads.



L2.88681.0 / LS.119

ADAPTER SPIGOT 1/4" F + 3/8" F THREADS

 0.032kg

Universal short 16mm spigot with double female thread 1/4" and 3/8".



L2.89320.0 / LS.036-38

LIGHTING STUD 3/8"

 0.07kg

Plugs into Super Clamp LS.035 for lighting fixtures or connecting 2 Super Clamps LS.035 allowing them to rotate. 16mm stud with 3/8" male threads.



L2.89322.0 / LS.066

DOUBLE FEMALE THREAD STUD

 0.025kg

Plugs into Super Clamp LS.035 to provide either a 3/8" or 1/4" female thread fixing.



L2.88653.0 / LS.036A

LIGHT STUD

 0.038kg

Special spigot for ARRI lighting fixture.



L2.88664.0 / LS.061RA

JOINING STUD RA

 0.025kg

Connects 2 Super Clamps LS.035 at right angles or 45° steps.



L2.88665.0 / LS.066BT

STUD FOR STIRRUP

 0.048kg

16mm stud with female thread M10. It has been specifically designed to mount it on a stirrup's fixture and easily connect it to a Super Clamp. Designed to be tightly locked with a wrench.



L2.88213.0 / LE.6000.A

SNAP-IN PIN FOR SUPER CLAMP

 0.048kg

Specifically designed to connect Grip Head to Super Clamp. Made in aluminum.



L2.89319.0 / LE.6000.C

As above in steel.

L2.88684.0 / LS.133

EXTENSION BAR

 0.1kg

Used to fix 2 Super Clamps LS.035 at a distance of 15cm from each other. Length: 16.5cm.



L2.88656.0 / LS.042

EXTENSION ARM

 0.21kg

 Type 1 + Spigot Art.013

 GC

Plugs into Super Clamp 035 socket. Length: 19.5cm



L2.88206.0 / LE.2020

ADDITIONAL SOCKET

 0.14kg

Provides an additional 16mm socket to Super Clamp LS.035



Please refer to section 9 for full specifications of these adapters.

- The mechanical concept on which we based this new range of clamps allows an incredible speed in locking and unlocking the clamp's jaws.
- Fastening the clamp to a pipe or any other support is quick and simple allowing you to position your lighting equipment securely.
- The Quick Action line of clamps consists of four models that differ in dimension, load capacity (from 7kg to 100kg) and coupling range (from 5mm to 80mm).
- All models patent pending.


L2.88137.0 / LC.3380.A

QUICK ACTION BABY CLAMP 16MM SPIGOT

- 0.76kg
- Type 33
- 50kg

Very slim and lightweight, this version has been designed for small luminaires, virtually unlimited in application. To meet all safety requirements, we have designed a dedicated slot for flexible steel safety cables.

Pipe size 20-52mm.

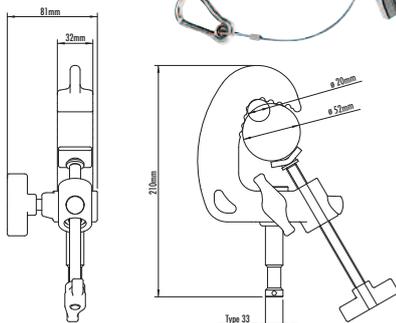


L2.88136.0 / LC.3370.A

QUICK ACTION JUNIOR CLAMP 28mm SOCKET

- 1.27kg
- 28mm
- 100kg

Made in gravity cast aluminium, this clamp is ideal to hang all types of luminaires in TV studios and heaters. Its incredible "coupling range" sets almost no limitations to its capability to clamp to almost all the industry standard pipe diameters. To meet all safety requirements, we have designed a dedicated slot for flexible steel safety cables. Supplied with T-top padded handle to improve grip.

Pipe size 40-70mm.

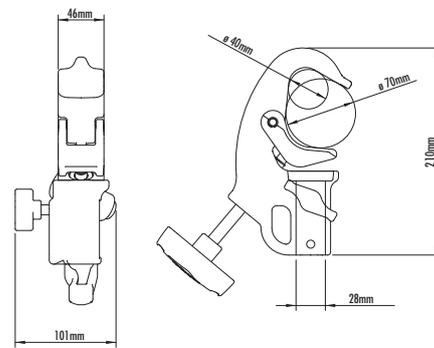


L2.88161.0 / LC.6490.A

QUICK RELEASE CLAMP

- 0.57kg
- 16mm
- 7kg

Different from the other versions that are used mainly on round pipes, this version will also work on square and rectangular tubes. Extremely light, with a good "coupling range", this version also offers an incredible number of attachment sizes. Ideal for photographic applications and dedicated accessories.

Pipe size 5-80mm.

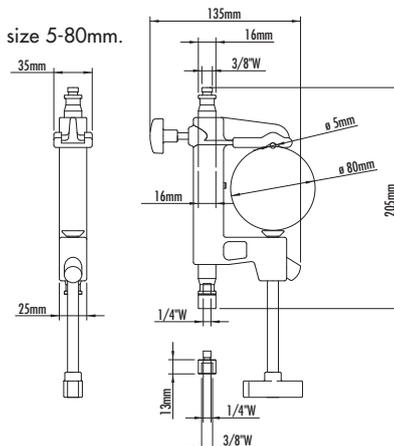


L2.88726.0 / LS.635

QUICK ACTION SUPER CLAMP

- 0.47kg
- 16mm hexagonal + M5 & 1/4" threads
- 15kg


The rapid action locking jaw has also been applied to the most well known clamp in the world, the original Super Clamp. These modifications allow us to keep its extreme versatility adding unrivaled speed in locking and unlocking. Supplied with wedge to allow the clamp to fit on flat surface. Pipe size 13-55mm.

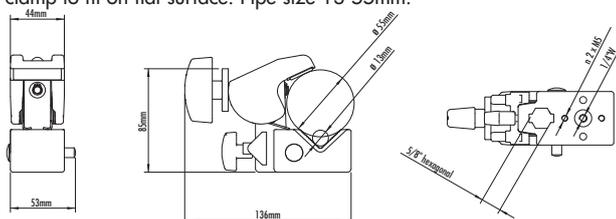

2 Clamps **Grab Clamps**


Low profile, high performance clamp.

- The Grab Clamp is flexible and fast to use thanks to its pincer jaw design and rapid locking and release mechanism.
- It can be fixed to a wider range of supports than traditional clamps and is suitable for use in TV, video and photographic studios, theatres and rigging structures. The grab clamp will hold all kinds of lights, scenery, monitors and much more besides.
- The grab clamp has been designed to be mounted on a wide range of beams, pipes and bars, whether round, square or rectangular in section. It needs no adapter - just open and clamp it.

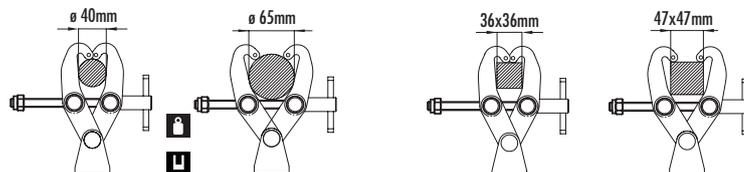

Clamp Range: 40mm to 65mm

Clamp Range: 36mm to 47mm

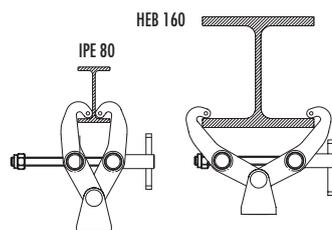

Clamp Range: IPE 80 to IPE 160
HEB 80 to HEB 160

L2.88138.0 / LC.3390.A

GRAB CLAMP

- 📦 1.2kg
- 📏 12.5mm Hole
- ⚖️ 150kg

Supplied without attachment, but with a 12.5mm hole for custom fixings.



L2.88140.0 / LC.3390.JS

GRAB CLAMP WITH 28mm TV SPIGOT

- 📦 1.4kg
- 📏 Type 35
- ⚖️ 150kg

Supplied with 28mm spigot.



L2.88139.0 / LC.3390.BB

GRAB CLAMP WITH 16MM BUSHING

- 📦 1.35kg
- 📏 16mm
- ⚖️ 50kg

Comes with 16mm bushing complete with push button for extra-safe attachment.



L2.88141.0 / LC.3390.LE

GRAB CLAMP WITH LIFTING EYE

- 📦 1.4kg
- 📏 Ring
- ⚖️ 150kg

Complete with standard lifting eye for chain or rope fixture.



L2.88143.0 / LC.3390.UH

GRAB CLAMP WITH UNIVERSAL HEAD

- 📦 1.95kg
- 📏 28mm
- ⚖️ 75kg
- 📏 16mm

Provided with a universal fixed (non-rotating) head.



L2.88142.0 / LC.3390.SP

GRAB CLAMP WITH SPINNING PULLEY

- 📦 1.65kg
- 📏 Pulley
- ⚖️ 150kg

Fitted with a 100mm diameter pulley to offer a quick and robust hanging point for TV and theatre scenery.



The new EYE COUPLER family: safer, easier to use and lighter, with the reliability and high performance that you expect from Manfrotto.

The new high-performance EYE COUPLER range has been developed with professional users' needs in mind. Improved safety, full TUV certification, optimised ergonomics and unique design are the key features of new EYE COUPLERS, developed for professionals in entertainment and film industries.



LIGHTENED HONEYCOMB STRUCTURE

Through a full FEM analysis (Finite Element Method) on traditional coupler design to identify the points of stress and deformation, we were able to drill out and lighten the coupler's structure, optimising resistance in major stress areas and hollowing excess material in low stress points. The result – a lighter yet more robust jaw structure.



WASHER SEAT

Tensile stress tests highlighted the advantages to be gained by further reinforcing the washer of the locking screw. The new washer seat, makes the eye coupler ultra-safe by eliminating slippage and aiding locking.



ERGONOMICS

The special design was developed in order to smooth off the jaw's structure, eliminating sharp edges and making the product easier to handle and use.




CONVENIENT JAW-LIMITING PIN

Eye Couplers have a unique jaw-limiting pin which, when inserted through the back of the clamp, stops the jaws from opening too far, thereby transforming the clamp into a hook.


This means that you can single-handedly hang heavy accessories and luminaires easily, quickly and above all, safely.



The complete **EYE COUPLER** range is made up of:-

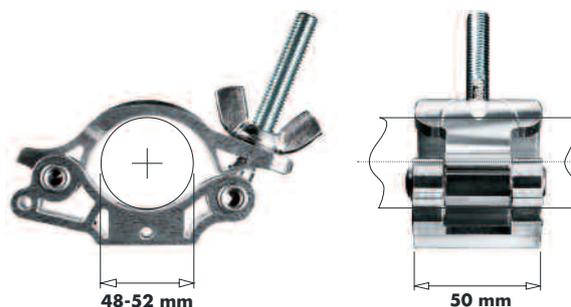

LP EYE COUPLER: industry standard Ø48-52mm pipe clamp range, load capacity up to 500kg, TUV certified. Available with a full range of fittings, including M12 bolt with nut, 28mm TV spigot, lifting ring.

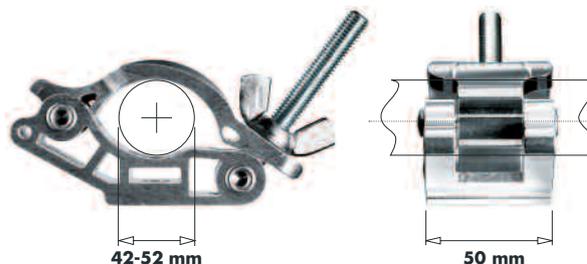

MP EYE COUPLER: wider Ø42-52mm pipe clamp range, special flattened jaw design for easier fixing in tight spaces, load capacity up to 500kg, TUV certified. Available with a full range of fittings.



MP SLIM EYE COUPLER: narrower, lighter version of MP Coupler for use in extremely small spaces, load capacity 300kg, TUV certified.

Eye couplers are provided with TUV certification – Production monitored type tested TUV certification. Stringent safety tests run by TUV organization confirm that EYE couplers comply with international safety and quality requirements.



Clamps LP Eye Coupler




L2.88119.0 / LC.460.A

LP EYE COUPLER

-  0.36kg
-  13mm Hole
-  500kg

The base model of LP eye coupler for any customised application.



L2.88120.0 / LC.461.A

LP EYE COUPLER WITH 28mm SPIGOT

-  0.57kg
-  Type 35
-  500kg

Supplied with 28mm spigot for TV/broadcast luminaires.



L2.88121.0 / LC.462.A

LP EYE COUPLER WITH 16mm SPIGOT

-  0.41kg
-  Type 33
-  500kg

Designed with 16mm spigot suitable for lightweight luminaires.



L2.88122.0 / LC.463.A

LP EYE COUPLER WITH LIFTING RING

-  0.55kg
-  Ring
-  300kg

Provided with lifting ring for multipurpose use with chains, wires and ropes.




L2.88123.0 / LC.464.A

LP EYE COUPLER WITH M12 BOLT PLUS NUT

-  0.40kg
-  M12x27
-  500kg

Supplied with M12 bolt and nut for custom solutions.



L2.88124.0 / LC.465.A

LP EYE COUPLER W/28mm BUSHING

-  0.84kg
-  28mm
-  300kg

Designed with 28mm bushing suitable for 2K+ stirrup luminaires.




L2.88129.0 / LC.480.A

LP PARALLEL EYE COUPLER

0.76kg

300kg

Twin couplers fixed parallel for firm, quick and easy interconnection for truss, bars or pipes.

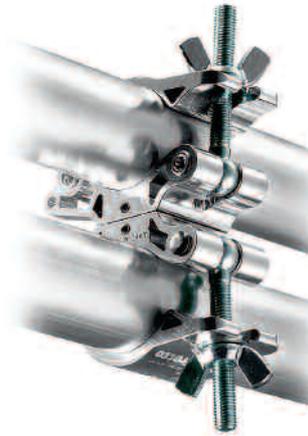

L2.88130.0 / LC.481.A

LP 90° FIXED EYE COUPLER

0.76kg

300kg

Twin couplers fixed at 90° for firm, quick and easy interconnection for truss, bars or pipes.



L2.88131.0 / LC.482.A

LP SWIVEL EYE COUPLER

0.76kg

300kg

Twin couplers free to rotate 360° for firm, quick and easy interconnection for truss, bars or pipes.



L2.88125.0 / LC.466.A

CONNECTION KIT FOR LP EYE COUPLER

Kit to connect two LC.460.A clamps.



Clamps MP Eye Coupler



L2.88144.0 / LC.4460.A

MP EYE COUPLER

-  0.39kg 
-  13mm Hole
-  500kg

The base model of MP eye coupler for any customised application.



L2.89323.0 / LC.4461.A

MP EYE COUPLER WITH 28mm SPIGOT

-  0.60kg 
-  Type 35
-  500kg

Supplied with 28mm spigot for TV/broadcast luminaires.



L2.88115.0 / LC.4462.A

MP EYE COUPLER WITH 16mm TV SPIGOT

-  0.44kg 
-  Type 33
-  500kg

Designed with 16mm spigot suitable for lightweight luminaires.




L2.88145.0 / LC.4463.A

MP EYE COUPLER WITH LIFTING RING

-  0.58kg 
-  Ring
-  300kg

Provided with lifting ring for multipurpose use with chains, wires and ropes.




L2.88146.0 / LC.4464.A

MP EYE COUPLER WITH M12 BOLT & NUT

-  0.43kg 
-  M12x27
-  500kg

Supplied with M12 bolt and nut for custom solutions.



L2.88147.0 / LC.4465.A

MP EYE COUPLER WITH 28mm BUSHING

-  0.87kg 
-  28mm
-  300kg

Designed with 28mm bushing suitable for 2K+ stirrup luminaires.



MP Eye Coupler & MP Slim Eye Coupler

L2.88150.0 / LC.4469.A

MP EYE COUPLER WITH 16mm BUSHING

 0.52kg

 16mm

 500kg

Supplied with 16mm spigot for light fixing accessories.



L2.89324.0 / LC.4470.A

MP TILT & SWIVEL EYE COUPLER

 1.30kg

 Type 35

 300kg

Provided with 28mm spigot to enable to rig a bar or a frame structure between two stands with 360° spigot rotation and swivel system.



L2.88153.0 / LC.4482.A

MP SWIVEL EYE COUPLER

 0.81kg

Twin couplers free to rotate 360° for firm, quick and easy coupling of trusses, bars or pipes.



L2.88156.0 / LC.4485.A

MP EYE COUPLER SWIVEL & TILT TRUSS SUPPORT 150-250

 2.78kg

 Type 35

Min. Length – 150mm Max. Length – 250mm Truss Support Coupler with a tilt/swivel connection to the stand pin. It avoids torsion and mounting problems when lifting a truss using two stands simultaneously.

L2.88157.0 / LC.4486.A

MP EYE COUPLER SWIVEL & TILT TRUSS SUPPORT 200-400 not illustrated

 2.78kg

 Type 35

Min. Length – 200 mm
Max. Length – 400 mm



L2.88158.0 / LC.4560.A

MP SLIM EYE COUPLER

 0.26kg

 13mm Hole 

 300kg

The base model of MP slimlight version eye coupler.



L2.88159.0 / LC.4564.A

MP EYE COUPLER WITH 12mm BOLT & NUT

 0.30kg

 M12x27mm 

 300kg

Supplied with M12 bolt and nut for custom solutions.

